



7 Watt GaN Power Amplifier, 1000 MHz to 2500 MHz,
Class AB, L & S Bands, 35% Efficiency, 28V, SMA

TECHNICAL DATA SHEET

PE15A5083

The PE15A5083 is a Class AB high power amplifier that operates in L and S bands from 1000 MHz to 2500 MHz and generates 7 Watts (typ) of CW RF power. The module utilizes the latest Gallium Nitride (GaN) semiconductor technology with 35% power added efficiency. The amplifier package design features an extremely small form factor of just 1.62in³ that's ideal for size, weight, and power (SWaP) constrained applications used in broadband RF telemetry, tactical communication, electronic warfare, and unmanned aircraft systems, as well as software defined radios. Impressive typical performance includes 44 dB of linear gain, 1.8:1 VSWR, +32.5 dBm third order intercept point, and harmonic suppression of -10 dBc. Operating voltage is +28 Vdc with 0.65A of DC current. Additional features include overvoltage protection, reverse voltage protection, and logic on/off control. The rugged Mil-Grade assembly supports female SMA RF input/output connectors and a micro-D 9 pin socket command control connector with an accessory cable assembly included. The operating baseplate temperature range is -40°C to +85°C and the unit is guaranteed to withstand up to 95% relative humidity, altitude levels up to 30,000 ft, and random vibration and shock profiles (see chart below). Pasternak also offers an accessory Harmonic filter option, model PEHFL0000 that can be used at the output of the PE15A5083 power amplifier. This lowpass RF filter has low insertion loss with power handling up to 50W and specifically designed to reduce harmonics at the output of transmitters operating at up through L & S Bands and offers rejection levels of greater than 25 dB from 3.25 GHz to 5 GHz. The filter is offered in a miniature SMA connectorized package.

Features

- 7W GaN High Power Amplifier
- L & S Band Class AB Design
- Frequency Range: 1000 MHz to 2500 MHz
- 44 dB linear Gain
- VSWR: 1.8:1
- +32.5 dBm IP3
- PAE: 35%
- Extremely Small Form Factor Rugged Mil-Grade Package
- 50 Ohm Design
- Female SMA RF Connectors
- +28Vdc @0.65A DC current
- -40°C to +85°C Operating Baseplate Temperature
- Output Harmonic Filter Accessory Option

Applications

- Broadband RF Telemetry
- RF Communications Systems
- Electronic Warfare - Airborne Electronic Attack
- Unmanned Aircraft Systems (UAS)
- Unmanned Ground Vehicles (UGV), Software Defined Radios
- Data Links
- Transmitters
- Test & Measurement
- Telecom Infrastructure

Electrical Specifications (TA = +25°C, DC Voltage = 28Volts, DC Current = 650mA)

Description	Minimum	Typical	Maximum	Units
Frequency Range	1		2.5	GHz
Small Signal Gain		45		dB
Gain Flatness		±4		dB
Input Power (CW)		+0		dBm
Pout at Sat.	5	7		Watts
Efficiency (PAE)		35		%
Output Power at 1 dB Compression Point		+33		dBm
Output 3rd Order Intercept Point		+35.5		dBm
Output Mismatch			10:1	
2nd Harmonics		-10		dBc

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [7 Watt GaN Power Amplifier, 1000 MHz to 2500 MHz, Class AB, L & S Bands, 35% Efficiency, 28V, SMA PE15A5083](#)



7 Watt GaN Power Amplifier, 1000 MHz to 2500 MHz,
Class AB, L & S Bands, 35% Efficiency, 28V, SMA

TECHNICAL DATA SHEET

PE15A5083

3rd Harmonics		-10		dBc
Impedance (Input)		50		Ohms
Impedance (Output)		50		Ohms
Input VSWR		1.8:1		
Operating DC Voltage	26	28	30	Volts
Operating DC Current		650	1.25	mA
Quiescent Current Biased (Bias Enable)		200		mA
Operating Temperature Range		-30	+85	°C

Performance by Frequency

Description	F1	F2	F3	F4	Units
Frequency Condition	1000	1500	2000	2500	MHz
Output Power @ 1dB Compression, Typ	25	24	24	33	dBm
Small Signal Gain, Typ (@-30 dBm Input)	45	44	43	41	dB
Third Order Intercept Point	35.5	32.5	33.5	35.5	dBm

Absolute Maximum Rating

Parameter	Rating	Unit
Max Device Voltage	32	V
Max Device Current	2.4	A
Max RF Input Power, $Z_L = 50 \Omega$	10	dBm
Max Operating Temperature (ambient)	60	°C
Max Operating Temperature (baseplate)	85	°C
Max Storage Temperature	85	°C



ESD Sensitive Material,
Transport material in
Approved ESD bags.
Handle only in approved
ESD Workstation.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [7 Watt GaN Power Amplifier, 1000 MHz to 2500 MHz, Class AB, L & S Bands, 35% Efficiency, 28V, SMA PE15A5083](#)



7 Watt GaN Power Amplifier, 1000 MHz to 2500 MHz,
Class AB, L & S Bands, 35% Efficiency, 28V, SMA

TECHNICAL DATA SHEET


PE15A5083

Mechanical Specifications

Size

Length	1.8 in [45.72 mm]
Width	1.8 in [45.72 mm]
Height	0.5 in [12.7 mm]
Weight	0.1 lbs [45.36 g]
Input Connector	SMA Female
Output Connector	SMA Female
Bias Connector	9-Pin Micro-D Socket

Environmental Specifications

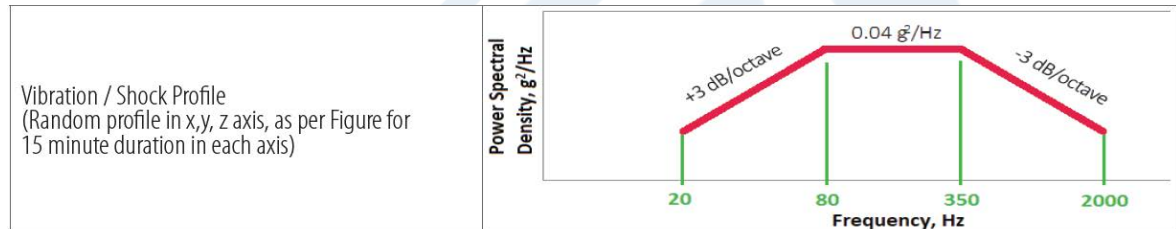

Temperature

Operating Range	-30 to +85 deg C
Storage Range	-40 to +85 deg C
Humidity	95% Non-Condensing
Altitude	MIL-STD-810F Method 5004

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

- Notes:
- Values at +25 °C, sea level

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [7 Watt GaN Power Amplifier, 1000 MHz to 2500 MHz, Class AB, L & S Bands, 35% Efficiency, 28V, SMA PE15A5083](#)



7 Watt GaN Power Amplifier, 1000 MHz to 2500 MHz,
Class AB, L & S Bands, 35% Efficiency, 28V, SMA

TECHNICAL DATA SHEET

PE15A5083

Amplifier Power-up Precautions

- 1.) Confirm that proper ESD precautions and controls are always in place before handling any Amplifier module.
- 2.) Confirm adequate thermal management is in place to effectively dissipate heat away from the Amplifier package. The Amplifier operational baseplate temperature must be within the operational temperature range stated in the Amplifier datasheet. Depending on the design and thermal requirements, using a heatsink with cooling fan is always recommended for safe reliable operation. A heat sink without a cooling fan may also be used. Damage caused from overheating will void the warranty.
- 3.) Confirm adequate system grounding is established. The DC power supply and Amplifier must have a common ground in order to operate properly.
- 4.) Power Amplifiers may require additional DC Current when initially powered-up. Depending on the design, the input current draw could range from an additional 10% to 100% above the maximum rated DC current of the Amplifier. This varies based on product part number.
- 5.) Confirm the DC power supply, if limited, is set to allow for additional start-up current that's rated for the Power Amplifier.
- 6.) Confirm the system is designed and calibrated for 50 ohms. Any impedance mismatch may cause performance issues.
- 7.) Perform a CALIBRATION (if required) with the loads before connecting the Amplifier to the Network Analyzer to ensure proper performance.
- 8.) Use a fixed attenuator between the signal source and input port of the Amplifier to optimize the input VSWR match.
- 9.) Confirm the input power level at the input port of the amplifier does not exceed the maximum rated limit for input power (as stated in the Amplifier datasheet).
 P_{in} for Small Signal Gain = P1dB-SSG-10 dB
 P_{in} for P1dB = P1dB-SSG+1 dB
- 10.) Confirm the Network Analyzer is always connected to the Amplifier first before DC power is applied to the Amplifier.
- 11.) As long as the input and output ports of the amplifier are connected to a 50Ohm load and RF signal power is applied, the Amplifier can be powered up with DC voltage.
- 12.) Confirm the Amplifier output load is matched for a 50 Ohm impedance and will not exceed the maximum rated VSWR or Return Loss limit for the Amplifier. Exceeding the maximum rated VSWR or Return Loss limit will result in reflected signal power that could damage the Amplifier and void the warranty.
- 13.) **Power Amplifier connected to an Antenna for signal transmission** - It's strongly recommended to use a high power fixed attenuator pad or an Isolator between the output port of the Amplifier and input port to the antenna. Any reflected signal power due to impedance mismatch will likely damage the Amplifier and void the warranty.
- 14.) The attenuator or isolator used at the output port of the Amplifier must be rated to handle the output power level and operational frequency band of the amplifier.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [7 Watt GaN Power Amplifier, 1000 MHz to 2500 MHz, Class AB, L & S Bands, 35% Efficiency, 28V, SMA PE15A5083](#)



7 Watt GaN Power Amplifier, 1000 MHz to 2500 MHz,
Class AB, L & S Bands, 35% Efficiency, 28V, SMA

TECHNICAL DATA SHEET

PE15A5083

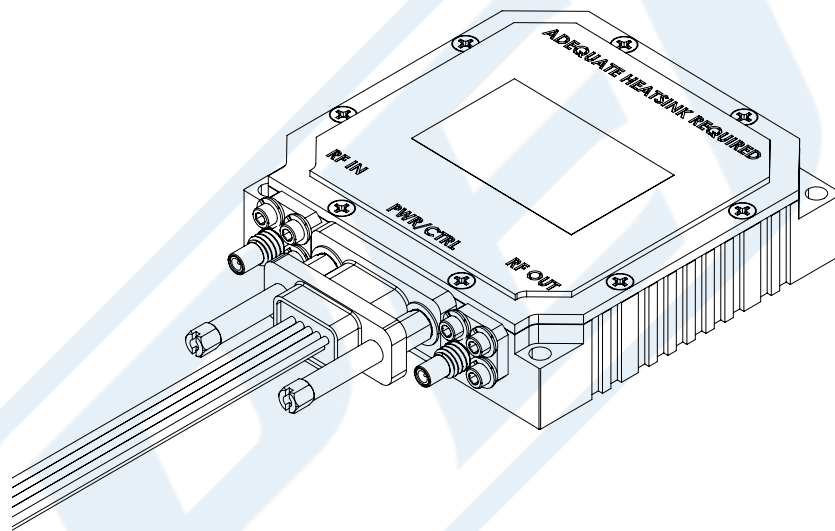


illustration of Amplifier & Interface Cable

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [7 Watt GaN Power Amplifier, 1000 MHz to 2500 MHz, Class AB, L & S Bands, 35% Efficiency, 28V, SMA PE15A5083](#)




7 Watt GaN Power Amplifier, 1000 MHz to 2500 MHz,
Class AB, L & S Bands, 35% Efficiency, 28V, SMA

TECHNICAL DATA SHEET


PE15A5083

Typical Performance Data


RF Output Power

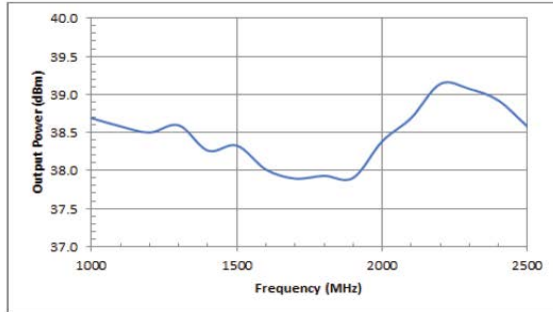


Efficiency

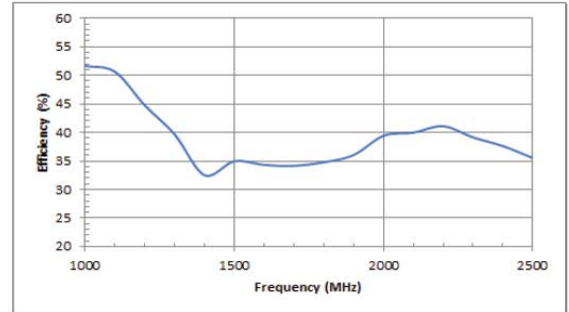


Error Vector Magnitude (%) [w/ QPSK Waveform]

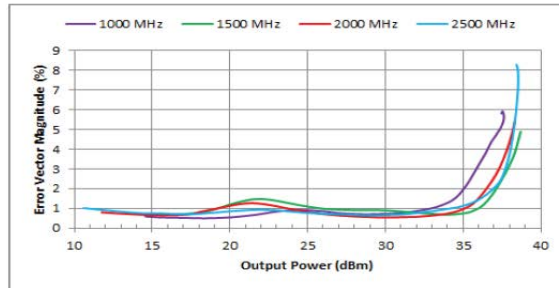


Error Vector Magnitude (dB) [w/ QPSK Waveform]

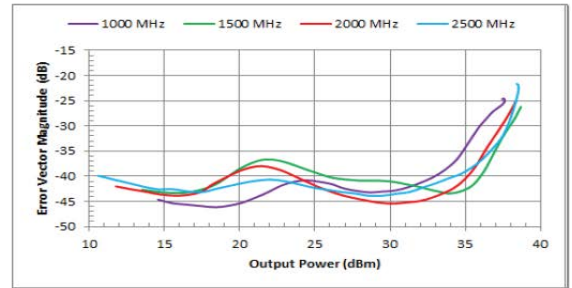

Error Vector Magnitude (%) [w/ 16QAM Waveform]

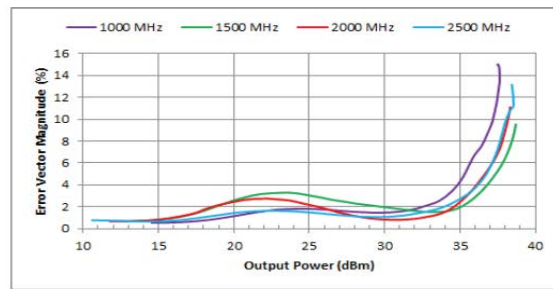

Error Vector Magnitude (dB) [w/ 16QAM Waveform]

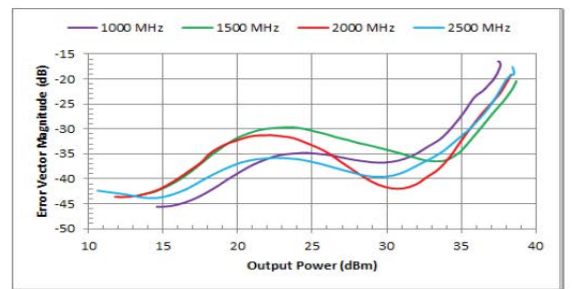

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [7 Watt GaN Power Amplifier, 1000 MHz to 2500 MHz, Class AB, L & S Bands, 35% Efficiency, 28V, SMA PE15A5083](#)




7 Watt GaN Power Amplifier, 1000 MHz to 2500 MHz,
Class AB, L & S Bands, 35% Efficiency, 28V, SMA


TECHNICAL DATA SHEET

PE15A5083


Error Vector Magnitude (%) [w/ 64QAM Waveform]

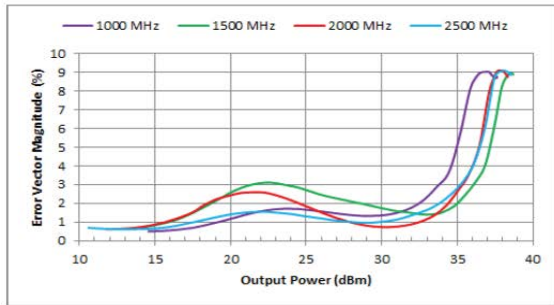


P1dB & P3dB

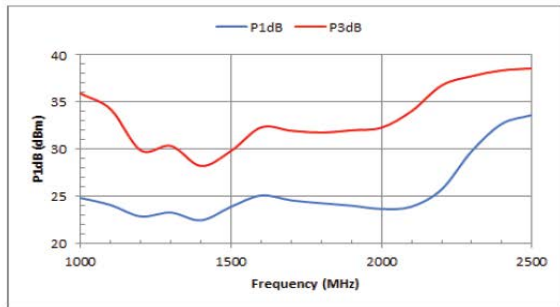

Error Vector Magnitude (dB) [w/ 64QAM Waveform]

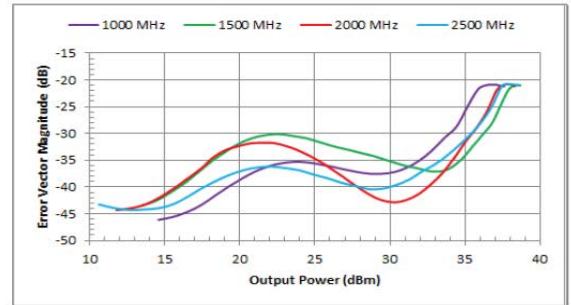

OIP3

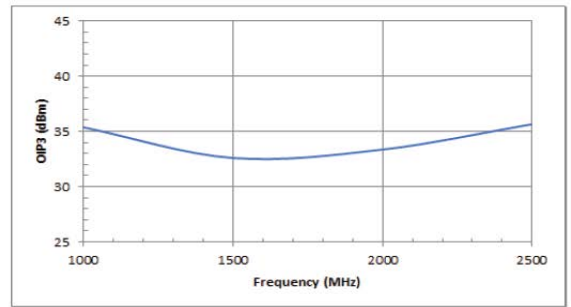

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [7 Watt GaN Power Amplifier, 1000 MHz to 2500 MHz, Class AB, L & S Bands, 35% Efficiency, 28V, SMA PE15A5083](#)




7 Watt GaN Power Amplifier, 1000 MHz to 2500 MHz,
Class AB, L & S Bands, 35% Efficiency, 28V, SMA


TECHNICAL DATA SHEET

PE15A5083


Harmonics (@ Psat)

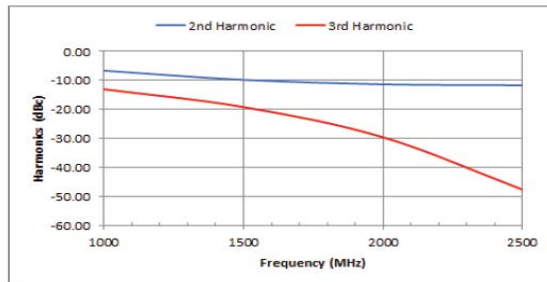


VSWR

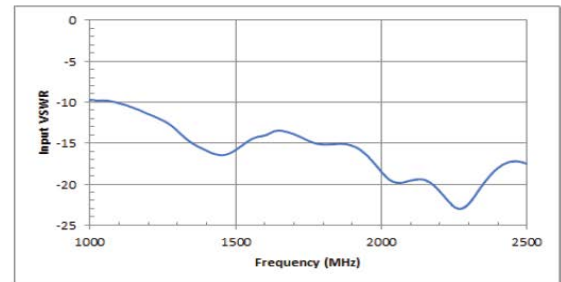

Output Power vs. Input Power

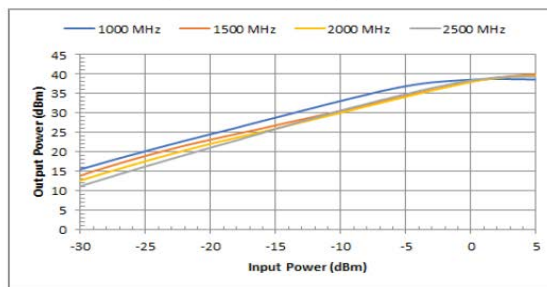

Gain vs. Input Power

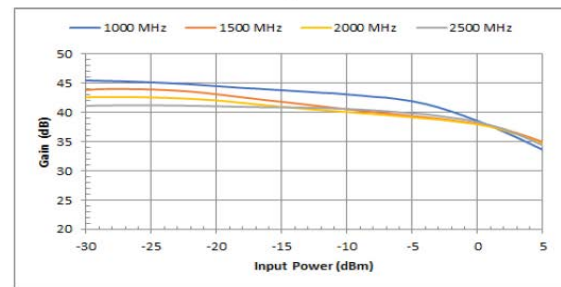

7 Watt GaN Power Amplifier, 1000 MHz to 2500 MHz, Class AB, L & S Bands, 35% Efficiency, 28V, SMA from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [7 Watt GaN Power Amplifier, 1000 MHz to 2500 MHz, Class AB, L & S Bands, 35% Efficiency, 28V, SMA PE15A5083](https://www.pasternack.com/45-db-gain-2.5-ghz-medium-power-high-gain-amplifier-sma-pe15a5083-p.aspx)


URL: <https://www.pasternack.com/45-db-gain-2.5-ghz-medium-power-high-gain-amplifier-sma-pe15a5083-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE15A5083 CAD Drawing

7 Watt GaN Power Amplifier, 1000 MHz to 2500 MHz, Class AB, L & S Bands, 35% Efficiency, 28V, SMA

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	6/12/2020	T. GALLA

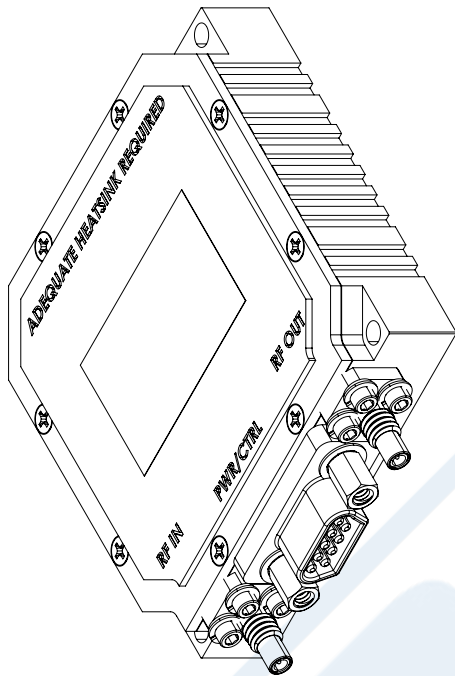

Pin #	I/O	Function
1,2	I	GND
3,4	I	DC Power (+28VDC)
5	I	RF Enable 0V or GND = RF ON +5V or NC = RF OFF
6,7,9	-	No Connect
8	0	Over Temperature Flag 0V = Temperature Fault +5V = No Fault

THIRD-ANGLE PROJECTION

THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF PASTERNAK CORPORATION. ALL RIGHTS RESERVED.

SHEET 1 OF 3

SCALE N/A

PE PASTERNAK
an INFINITO brand

Pasternack Enterprises, Inc.
P. O. Box 16759, Irvine, CA 92623.
Phone: 1.949.261.1920 | 1.866.727.8376
Fax: 1.949.261.7451
Website: www.pasternack.com
E-mail: sales@pasternack.com




SIZE A CAGE CODE 53919 DRAWN BY K.DANG ITEM NO. PE15A5083 REV. A

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:

.X = ±.2 [5.08] FRACTIONS ± 1/32
.XX = ±.02 [.51] ANGLES ± 1°
.XXX = ±.005 [.13] CABLE LENGTH (L) TOLERANCES:
L ≤ 12 [305] = +1 [25] / -0
12 [305] < L ≤ 60 [1524] = +2 [51] / -0
60 [1524] < L ≤ 120 [3048] = +4 [102] / -0
120 [3048] < L ≤ 300 [7620] = +6 [152] / -0
300 [7620] < L = +5% / L / -0

ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.

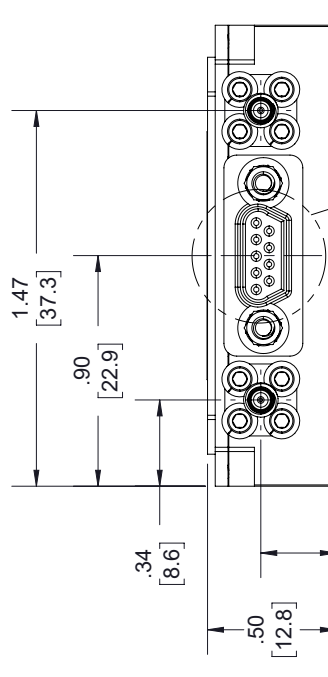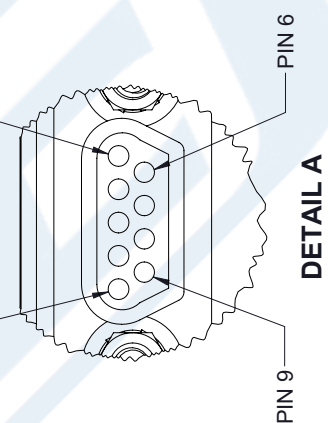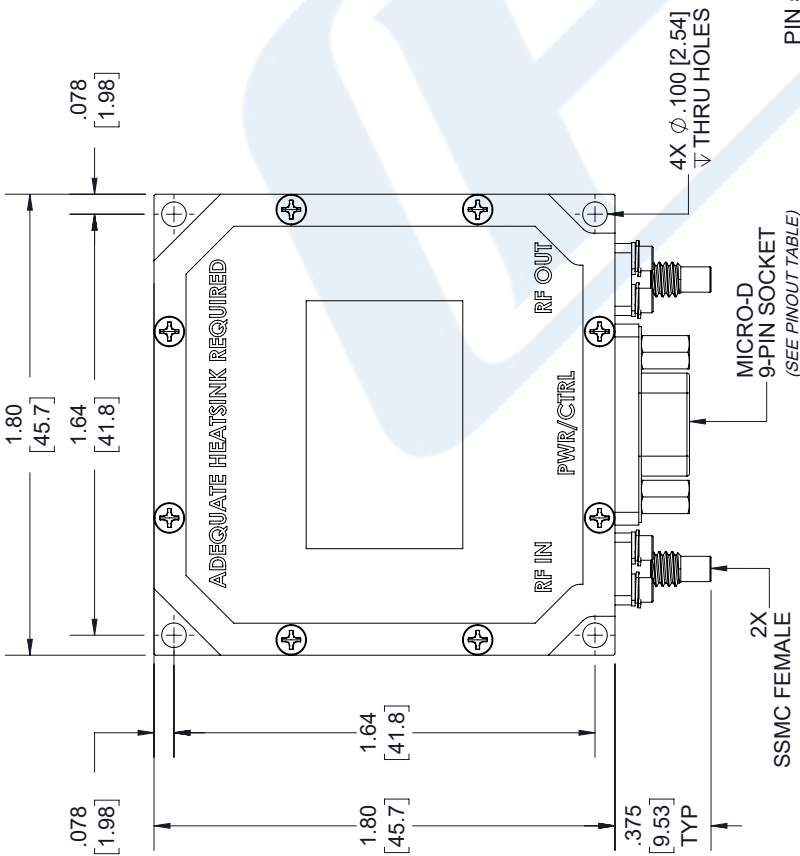


PE PASTERNAK
an INFINITO brand
www.pasternack.com
PE15A5083
V001923YYYMMDDXXXX

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.


PE15A5083 CAD Drawing

7 Watt GaN Power Amplifier, 1000 MHz to 2500 MHz, Class AB, L & S Bands, 35% Efficiency, 28V, SMA

INTERFACE CABLE

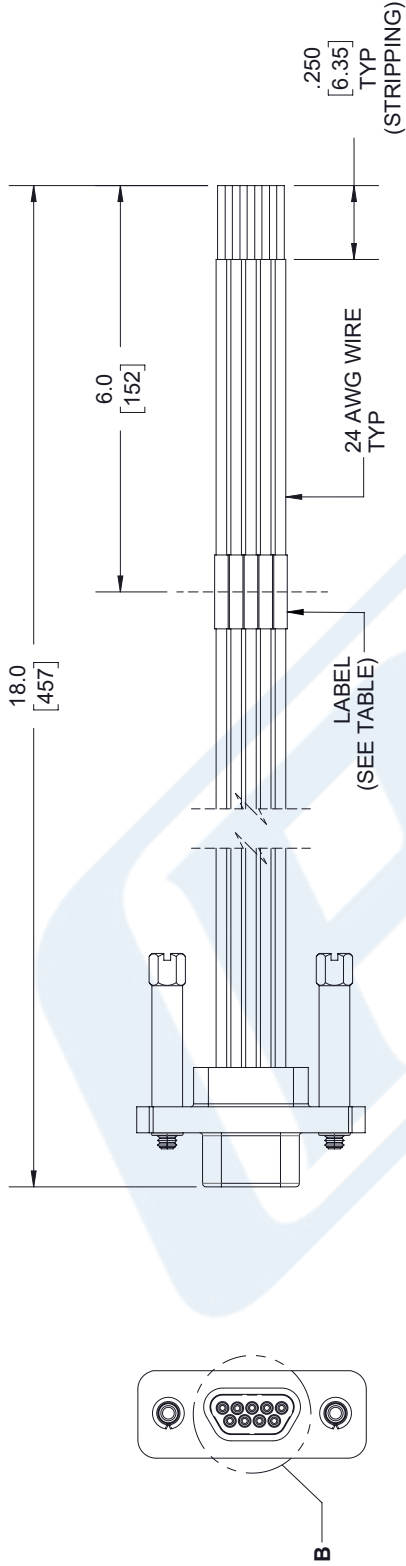

Pin #	Wire Color	Pinout Label
1	Black	GND
2	Brown	GND
3	Red	+ 28V
4	Orange	+ 28V
5	Yellow	RF Enable
6	Green	No Connect
7	Blue	No Connect
8	Purple	Temp Flag
9	Gray	No Connect

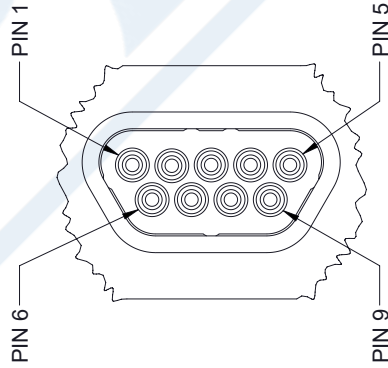

DETAIL B

UNLESS OTHERWISE SPECIFIED
LEADING DIMENSIONS ARE INCHES
DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:

.X = ±.2 [5.08] FRACTIONS ± 1/32
 .XX = ±.02 [.51] ANGLES ± 1°
 .XXX = ±.005 [.13] CABLE LENGTH (L) TOLERANCES:
 L ≤ 12 [305] = +1 [25] / -0
 12 [305] < L ≤ 60 [1524] = +2 [51] / -0
 60 [1524] < L ≤ 120 [3048] = +4 [102] / -0
 120 [3048] < L ≤ 300 [7620] = +6 [152] / -0
 300 [7620] < L = +5% / L / -0

ALL DIMENSIONS SHOWN
ARE FOR REFERENCE ONLY.

THIRD-ANGLE PROJECTION

THE INFORMATION AND
DESIGN IN THIS DOCUMENT
IS THE PROPERTY OF
PASTERNAK CORPORATION
ALL RIGHTS RESERVED.

SHEET 2 OF 3
SCALE N/A

REV A



PASTERNAK
an INFINIT brand
Pasternack Enterprises, Inc.
P. O. Box 16759, Irvine, CA 92623.
Phone: 1.949.261.1920 | 1.866.727.8376
Fax: 1.949.261.7451
Website: www.pasternack.com
E-mail: sales@pasternack.com

ITEM NO. PE15A5083
CAGE CODE DRAWN BY K.DANG
SIZE A 53919