



779 MHz Ceramic Bandpass Filter

Part Number: AM779B1192

ANATECH ELECTRONICS INC
RF & Microwave Filters & Products



Electrical specifications

Center Frequency: 779 MHz
Bandwidth: F0 +/- 9MHz
Input / Output Impedance: 50 Ohms
Insertion Loss: 2.0 dB max
Ripple in BW: 0.7 dB max
VSWR: 1.5 : 1
Rejection: 50dB min at 1077.2 - 1095.2MHz
Power Handling: 2 W

Mechanical


Mounting Method: SMT
Dimensions: 17 x 13 x 5.5 mm

Environmental

Operating Temperature: -20 C to +70 C
Storage Temperature: -50 C to +90 C

This product is RoHs compliant.

Outline Drawing:

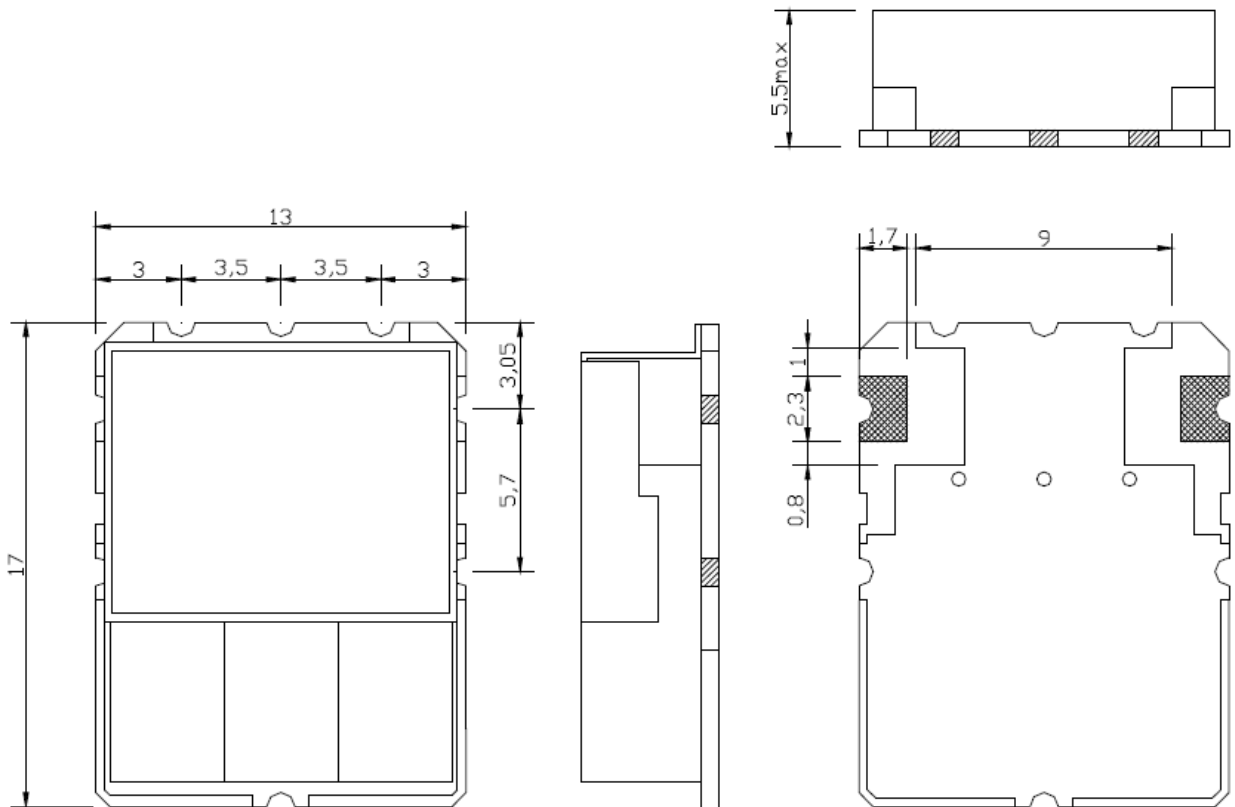

UNIT:mm

TOLERANCE:±0.3