


REV. 0
DCO 170672

| | |
|-----------------|----------------------------|
| COIL: @ 25°C | |
| RESISTANCE | 10000 OHMS $\pm 10\%$ |
| NOMINAL VOLTAGE | 4.0 mADC |
| MUST OPERATE | 2.0 mADC |
| MUST RELEASE | 1.0 mADC MAX 0.20 mADC MIN |

| | |
|--------------|---------------------------|
| ENVIRONMENT: | |
| VIBRATION | 10 Hz TO 2000 Hz @ 15 g's |
| SHOCK | 100 g's 6 MS. DURATION |
| TEMPERATURE | -65 °C TO +125 °C |

NOTES:
 OPERATE TIME 15 MS MAX.
 RELEASE TIME 10 MS MAX.
 CONTACT BOUNCE 2 MS MAX.

CUSTOMER DATA SHEET

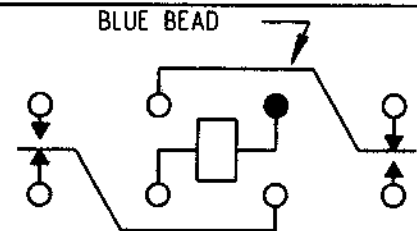

TERMINAL VIEW

CONTACT RATING:
 LOW LEVEL TO
 2 AMPS 28 VDC RESISTIVE
 100,000 OPERATIONS

DR. ASB 10 JUL 02

Handwritten signature and date: 7/11/02

Cil Technologies
 advanced control electronic solutions

CUST. QPL
 CUST. NO. M5757/13-143 REV.

3SAT RELAY

3SAT1360A2