

MINIATURE CERAMIC SMD OSCILLATOR (7.0 x 5.0 x 1.7mm)

FEATURES




- 32.768kHz REAL TIME CLOCK
- INDUSTRIAL TEMPERATURE RANGE
- LOW CURRENT / LOW VOLTAGE



■ SPECIFICATION

FREQUENCY	STD: 32.768kHz (25kHz ~ 1MHz available)	
FREQUENCY TOLERANCE @ 25°C	±30ppm max.	
FREQUENCY STABILITY	±20ppm ~ ±100ppm	
OPERATING TEMPERATURE RANGE	STD: 0°C ~ 70°C, Option: -40°C ~ 85°C (See P/N guide for other options)	
STORAGE TEMPERATURE RANGE	-55°C ~ 125°C	
SUPPLY VOLTAGE ±10%	1.8V _{DC} ~ 5.0V _{DC}	
SUPPLY CURRENT	200µA max. (10µA available)	
OUTPUT	LOGIC FAMILY	HCMOS
	LOAD	15pF
	LEVEL LOGIC '1' (V_{OH})	0.9 x V _{DD} min.
	LEVEL LOGIC '0' (V_{OL})	0.1 x V _{DD} max.
	SYMMETRY(DUTY CYCLE)	STD: 40% /60% @ 1/2V _{DD} level (over -40°C ~ +85°C), option: 45% / 55%
	RISE AND FALL TIME (Tr/Tf)	30nS max.
STAND-BY VOLTAGE	START-UP TIME	10mS max.
	ENABLE (V_{IH})	0.7 x V _{DD} ≤ V _{IH} ≤ V _{DD} OR N/C
	DISABLE (V_{IL})	V _{IL} ≤ 0.3 x V _{DD}
AGING @ +25°C ±3°C	±3.0ppm / 1 st year max.	
PHASE JITTER RMS (12kHz ~ 20MHz)	1pS max.	

■ PACKAGE DIMENSIONS




Unit : mm

Pin Configuration	
1	Disable Enable
2	GND
3	Z* Output
4	V _{DD}


*Z: high impedance

■ SOLDER PATTERN



*0.01µF to 0.1µF bypass capacitor recommended

■ REFLOW PROFILE

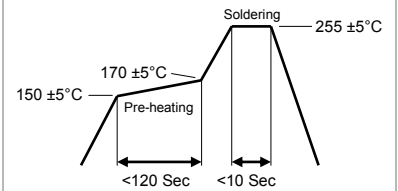

Note: Consult factory for detail

■ PART NUMBERING GUIDE

