


DA1206C121R-10



PHYSICAL DIMENSIONS:

A	3.20 [.126]	+ 0.200 [.008]
B	1.60 [.063]	+ 0.200 [.008]
C	0.80 [.031]	+ 0.200 [.008]
D	0.40 [.016]	+ 0.150 [.006]
D1	0.30 [.012]	+ 0.200 [.008]
E	0.80 [.031]	+ 0.100 [.004]

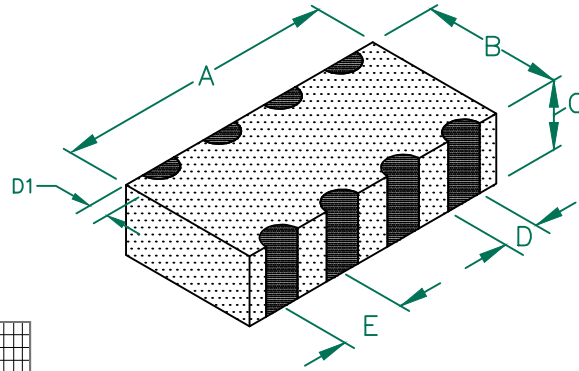


ELECTRICAL CHARACTERISTICS:

Z @ 100MHz (Ω)	DCR (Ω)	Rated Current
Nominal	120	
Minimum	90	
Maximum	150	0.2
300 mA		
LINE TO LINE INSULATION RESISTANCE >100 M Ω AT 75 VOLTS.		

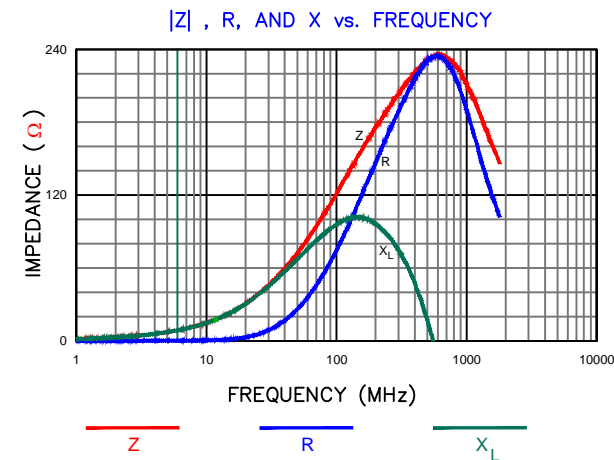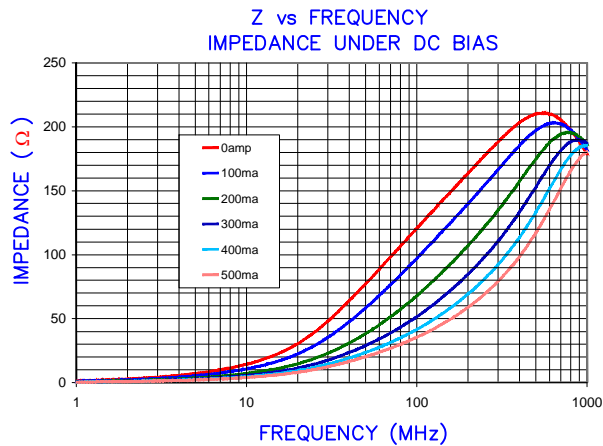


LAND PATTERNS FOR REFLOW SOLDERING

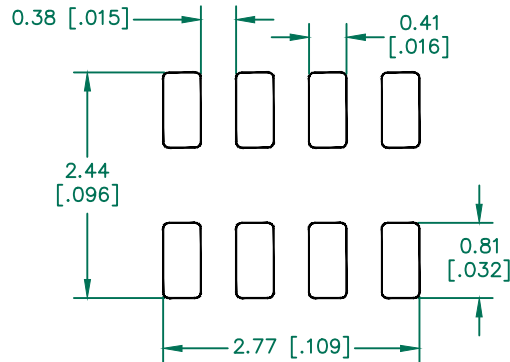

(For wave soldering, add 0.762 (0.030) to this dimension)

RECOMMENDED SOLDERING CONDITIONS

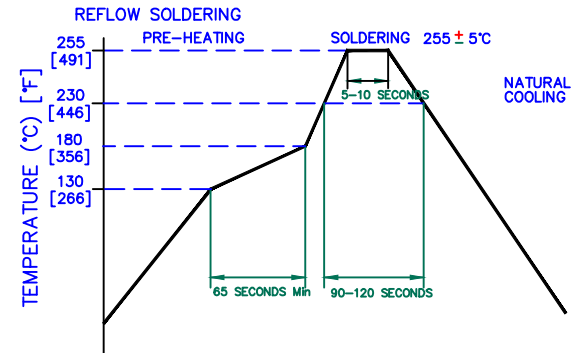

AGILENT E4991A RF Impedance/Material Analyzer
HP 16194A Test Fixture. TEST REF. 3124

RoHS

DIMENSIONS ARE IN mm [INCHES].				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.			
D	OPERATING TEMPERATURE UPDATE LAIRD LOGO AND REFLOW CURVE	08/05/13	QU				
C	UPDATE COMPANY LOGO ADD ROHS	05/20/09	JRK				
B	D1 dim chgd from 0.008 ± 0.004 to 0.012 ± 0.008. UPDATE COMPANY LOGO	10/30/07	JRK				
A	ORIGINAL DRAFT	03/30/04	TMB				
REV	DESCRIPTION	DATE	INT				
PROJECT/PART NUMBER: DA1206C121R-10				REV D	PART TYPE: CO-FIRE	DRAWN BY: TMB	
DATE: 03/30/04				SCALE: NTS	SHEET: 1 of 1		
CAD # DA1206C121R-10-D				TOOL # -			