

# Type ANK58 Automotive Blade Fuse 3 Terminal (Micro3)



www.optifuse.com (619) 593-5050


### Specifications:

- Voltage: 58V DC
- Amperage: 5A, 7.5A, 10A, 15A
- Body Material: Nylon with 25% Fiberglass
- Cover Material: Nylon with 25% Fiberglass, Blue
- Metal Material: Copper Alloy, gal Sn
- Element: Zinc Alloy, Sn plated
- Interrupting Rating: 1000A @ 58 VDC

Part Number	Amperage	Body Color
ANK58-5A	5A	Tan
ANK58-7.5A	7.5A	Brown
ANK58-10A	10A	Red
ANK58-15A	15A	Blue

Time Characteristics:		
% of Rated Current	Min Hold Time	Max Hold Time
110%	100h	
135%	750ms	1800s
200%	150ms	5s
350%	40ms	500ms
600%	20ms	100ms

### Mechanical Dimensions: Inches [mm]

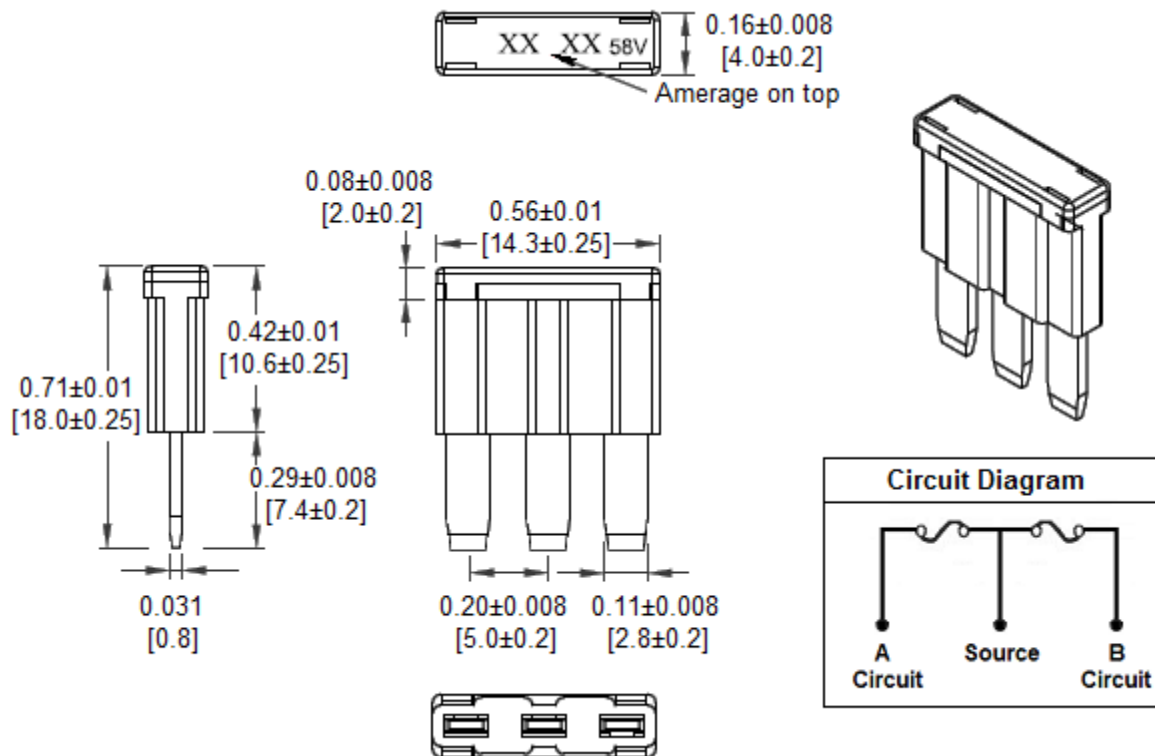

	<p><b>Warning:</b> -Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.</p>
	<p>-Avoid contact of device with chemical solvent. Prolonged contact will damage the device performance.</p>