

# 22V and 40V, 3A to 20A High Density Power Modules

**PRODUCT FAMILY**

XR79203	40V, 3A	8 x 8 x 4 (mm)
XR79206	40V, 6A	10 x 10 x 4 (mm)
XR79103	22V, 3A	6 x 6 x 4 (mm)
XR79106	22V, 6A	8 x 8 x 4 (mm)
XR79110	22V, 10A	10 x 10 x 4 (mm)
XR79115	22V, 15A	12 x 12 x 4 (mm)
XR79120	22V, 20A	12 x 14 x 4 (mm)

**FEATURES**

- Integrated controller, drivers, bootstrap diode / capacitor, MOSFETs, inductors, capacitors
- 22V or 40V maximum input voltage
- 0.6V to 5.5V or 13.2V output voltage range
- High efficiency

**BENEFITS**


- Complete power stage allows fast time-to-market
- Easy to use
- High density

**MAXLINEAR'S DIFFERENTIATION**


- Industry's smallest 20A power module
- Low profile allows mounting on backside of boards
- Exceptional thermal performance
- Patented COT control
- QFN packaging with all pins accessible allows for easier debugging
- 260° lead solder temperature easier to manufacture

**APPLICATIONS**

- FPGA, DSP and ASIC power systems
- Industrial and embedded systems
- Telecommunications
- Industrial control and automation
- Infrastructure equipment
- Drones and remote vehicles

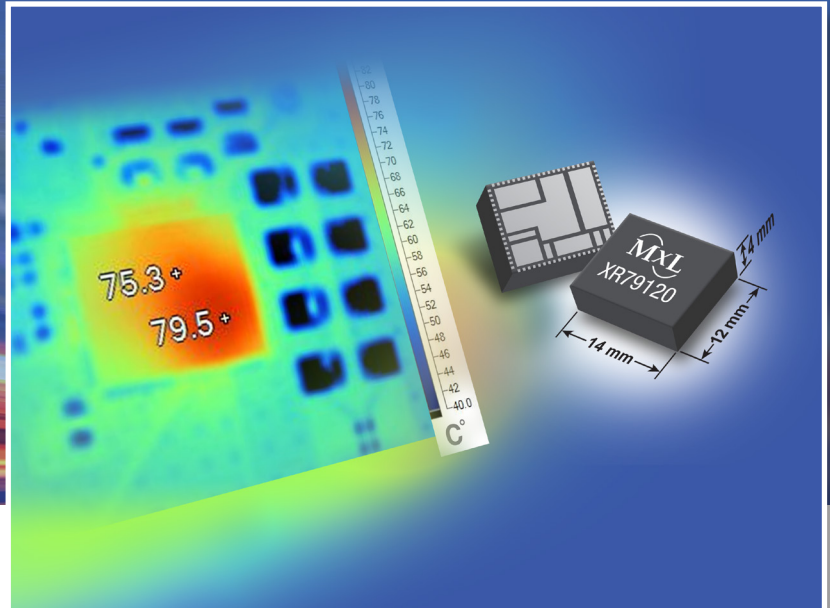

This family of power modules addresses high-current single-channel solutions for various end applications. These synchronous step-down power modules are complete system-in-package power management solutions with fully integrated power converters including MOSFETs, inductors and internal input and output capacitors. A patented emulated current mode Constant On-Time (COT) control provides exceptional full range 0.1% line regulation and 1% output accuracy over the full temperature range. This COT control loop enables operation with ceramic output capacitors, eliminating loop compensation components. Available in a QFN package, our modules provide superior thermal performance and manufacturability. The QFN package makes visual inspection of solder joints possible and eases electrical debugging.

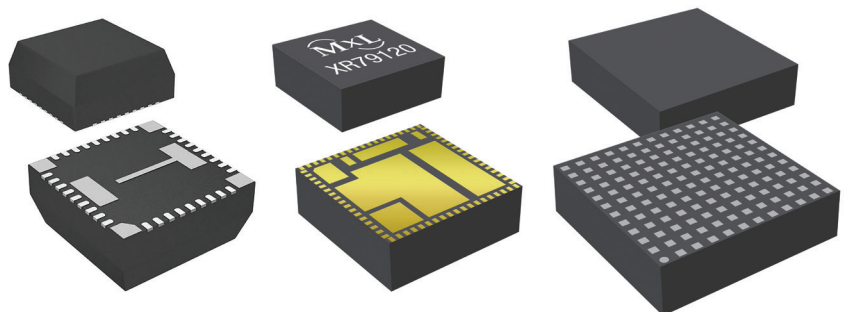
**MaxLinear QFN vs. Competition**


- Large pads provide better thermal performance
- All pins accessible for easier debugging and routing
- 260°C lead solder temperature vs. 245°C (LGA)


## Power Modules

Part Number	I <sub>OUT</sub> (A)	V <sub>IN</sub> (V)	V <sub>OUT</sub> (V)	Frequency (kHz)	Efficiency (%)	QFN Dimension (mm)	Features
XR79203	3	3 to 40	0.6 to 13.2	300 to 500	95	8 x 8 x 4	<ul style="list-style-type: none"> <li>▪ UVLO</li> <li>▪ OTP</li> <li>▪ Soft-start</li> <li>▪ Adjustable hiccup current limit</li> <li>▪ Short-circuit protection</li> <li>▪ PGOOD</li> </ul>
XR79206	6	3 to 40	0.6 to 13.2	300 to 500	95	10 x 10 x 4	
XR79103	3	3 to 22	0.6 to 5.5	600 to 800	95	6 x 6 x 4	
XR79106	6	3 to 22	0.6 to 5.5	600 to 800	95	8 x 8 x 4	
XR79110	10	3 to 22	0.6 to 5.5	400 to 600	95	10 x 10 x 4	
XR79115	15	3 to 22	0.6 to 5.5	400 to 600	95	12 x 12 x 4	
XR79120	20	3 to 22	0.6 to 5.5	400 to 600	95	12 x 14 x 4	

## Efficiency and Thermal Performance

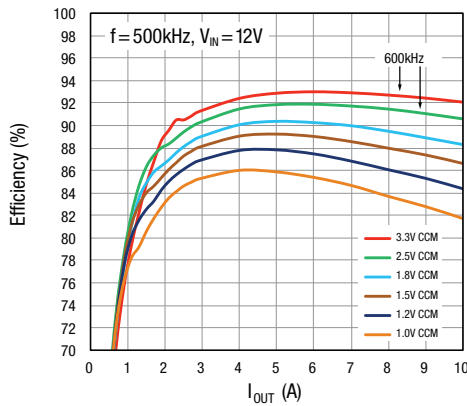

XR79110 Efficiency

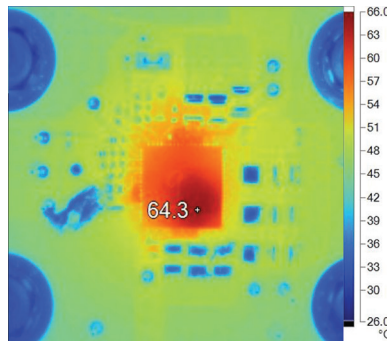


XR79110 Thermal Image



XR79110 Evaluation Board

Thermal performance based on real-world conditions  
(XR79110EVB – compact 2.5" x 2.5" 6 layer board)

## Typical Schematic

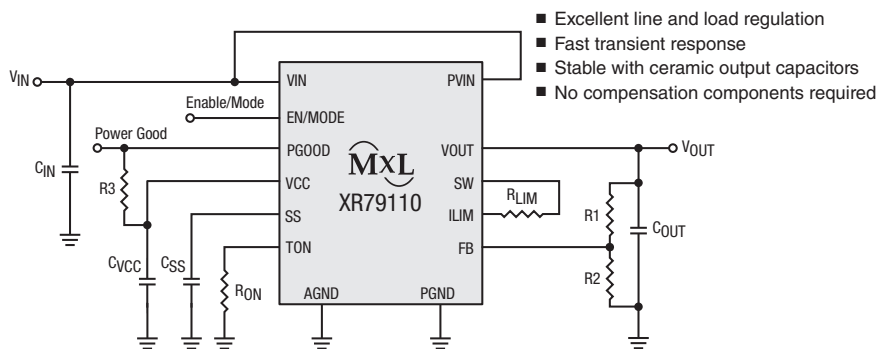

**Corporate Headquarters:**  
5966 La Place Court  
Suite 100  
Carlsbad, CA 92008  
Tel.: +1 (760) 692-0711  
Fax: +1 (760) 444-8598  
[www.maxlinear.com](http://www.maxlinear.com)

The content and information contained in this document is furnished for informational or general marketing purposes only, is subject to change without notice, and should not be construed as a commitment by MaxLinear, Inc. MaxLinear, Inc. assumes no responsibility or liability for any errors, inaccuracies, or incompleteness that may appear in the informational content contained in this guide.

Reproduction, in part or whole, without the prior written consent of MaxLinear, Inc. is prohibited. MaxLinear, the MaxLinear logo, and any MaxLinear trademarks; MxL, Full-Spectrum Capture, FSC, G.now, and AirPHY are all trademarks of MaxLinear, Inc. or one of MaxLinear's subsidiaries in the U.S.A. and other countries. Other company trademarks and product names appearing herein are the property of their respective owners.

© 2019 MaxLinear, Inc. All rights reserved.