



Electrical specifications

Center Frequency: 915 MHz
Bandwidth: 5.5 MHz min.
Insertion loss: 0.75 dB max 0.5 typ
Attenuation 1: 40 dB@1.25 MHz from the edge
Attenuation 2: 50 dB@3.25 MHz from the edge


Mechanical

Mounting Method: Threaded Mounting Holes
Connector Type: N Female
Dimensions: 6.75" X 10" X 3" in

Environmental

Operating Temperature: -45 to +85° C
Storage Temperature: -55 to +95° C
Shock: 20 G. 11ms
Vibration: 20 G. 5 to 200 MHz


Outline Drawing:

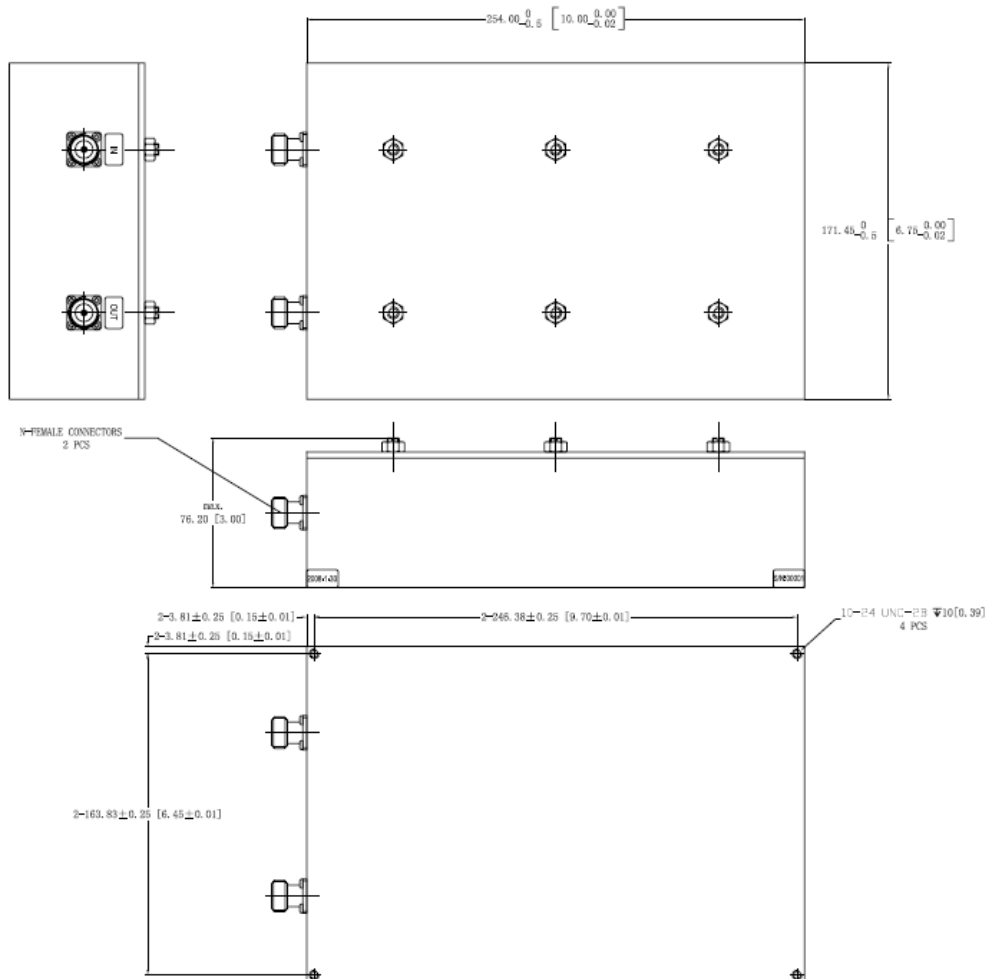



Plot:

Simulation Curve Insertion loss

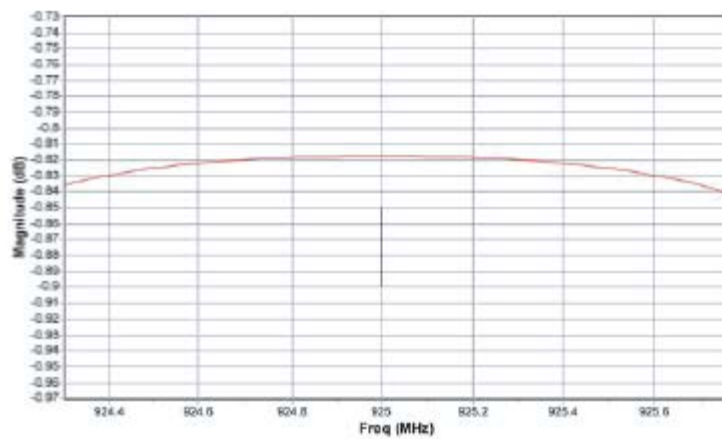

Attenuation

