


FR0H224ZF

Aliases (USCFR00H224Z00)

FR, Supercapacitors, Radial Pin, 0.22 F, -20/+80%, 5.5 VDC, Pin Leads, Lead Spacing = 5.08mm

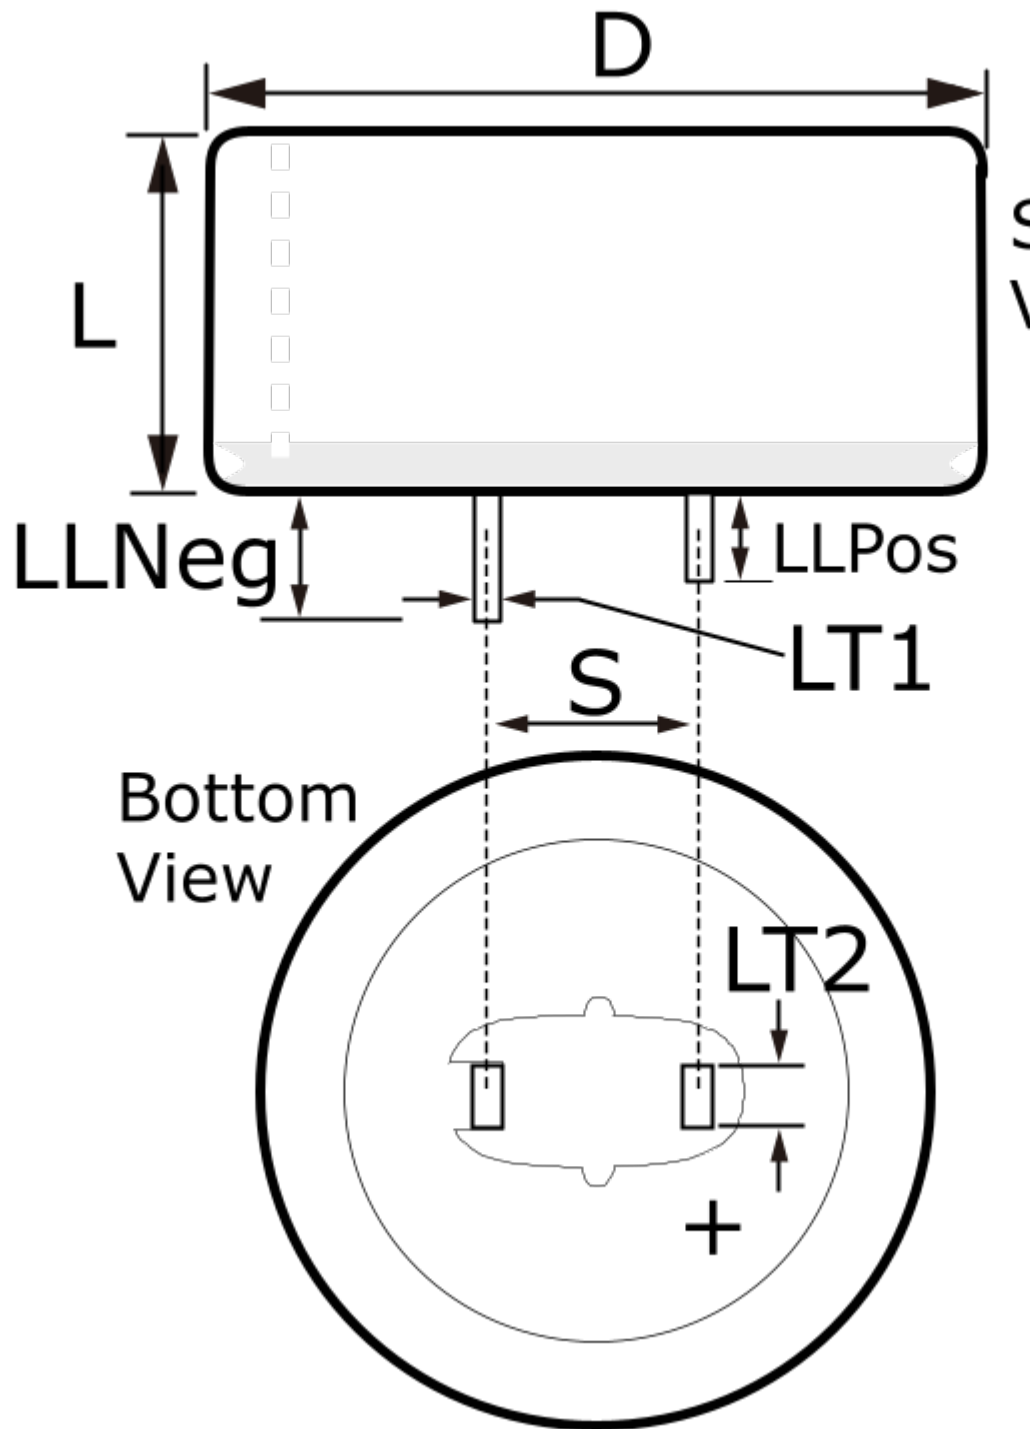

Click [here](#) for the 3D model.

Dimensions

D	14.5mm +/-0.5mm
L	21mm MAX
S	5.08mm +/-0.5mm

Dimensions

LL Negative 2.7mm MIN
LL Positive 2.4mm MIN
LT1 0.4mm +/-0.1mm
LT2 1.2mm +/-0.1mm

Packaging Specifications

Lead Pin Leads
Packaging Bulk, Box
Packaging Quantity 300

General Information

Series FR
Description Radial Cylindrical Double Layer Capacitor
RoHS Yes
AEC-Q200 No
Component Weight 5.3 g
Miscellaneous Discharge Value = 0.33 F.

Specifications

Capacitance 0.22 F
Capacitance Tolerance -20/+80%
Voltage DC 5.5 VDC
Temperature Range -40/+85°C
Rated Temperature 85°C
Resistance 180000 mOhms (1kHz)
Discharge Current 0.33 mAmps (30 Minutes After Charging)

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.

Generated 5/18/2023 - c198f3ff-7652-41df-a324-2c2f8bd00c98

© 2006 - 2023 KEMET

Generated 5/18/2023 - c198f3ff-7652-41df-a324-2c2f8bd00c98

© 2006 - 2023 KEMET