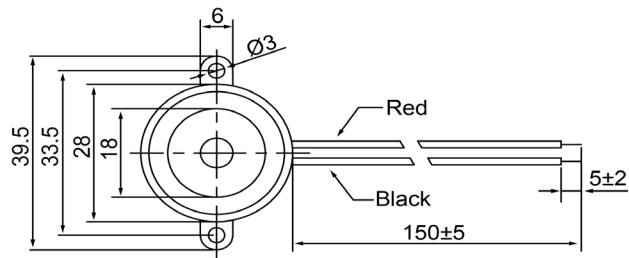


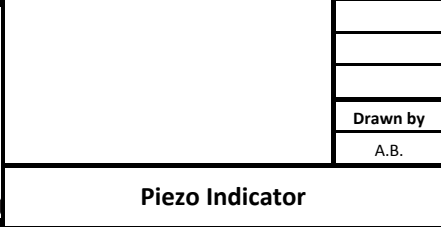


TOP VIEW



SIDE VIEW



Specifications			Notes	Revision History																	
Description	Value	Unit		Version	Description	Date	Approved														
Technology	Piezo		1) All dimensions are in mm unless otherwise noted 2) All parts meet RoHS	1	Released from Engineering	10/21/2013	J.S														
Resonant Frequency	3,500	(Hz)																			
Rated Voltage	12	(V)																			
SPL @ 10cm	95	(dBA)																			
Tone	Single																				
Mount Type	Flange Mount																				
Voltage Range	4 ~ 28	(V)																			
Max Rated Current	15	(mA)																			
Housing Material	ABS																				
Operating Temperature	-20 ~ +60	°C																			
Storage Temperature	-30 ~ +70	°C																			
Weight	15	(g)																			
						<table border="1"> <thead> <tr> <th>Drawn by</th> <th>Date</th> <th>Checked by</th> <th>Date</th> <th>Approved by</th> <th>Date</th> </tr> </thead> <tbody> <tr> <td>A.B.</td> <td>10/21/2013</td> <td>C.E.</td> <td>10/21/2013</td> <td>J.S</td> <td>10/21/2013</td> </tr> </tbody> </table>				Drawn by	Date	Checked by	Date	Approved by	Date	A.B.	10/21/2013	C.E.	10/21/2013	J.S	10/21/2013
						Drawn by	Date	Checked by	Date	Approved by	Date										
A.B.	10/21/2013	C.E.	10/21/2013	J.S	10/21/2013																
IP283512-1																					