




NOTES:

Current Rating:0.5AMP
 Contact Resistance:30mΩ max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:500MΩ min
 Operation Temperature:-40℃ to +85℃

Contact Material:Phosphor Bronze
 Contact plating:Au or Sn Over Ni
 Earth-Plate Material:Brass
 Earth-plate plating:Sn all over Ni
 Insulator Material:Polyester (UL94V-0)
 Standard :Housing LCP+30%G.F
 Slider PPS+30%G.F

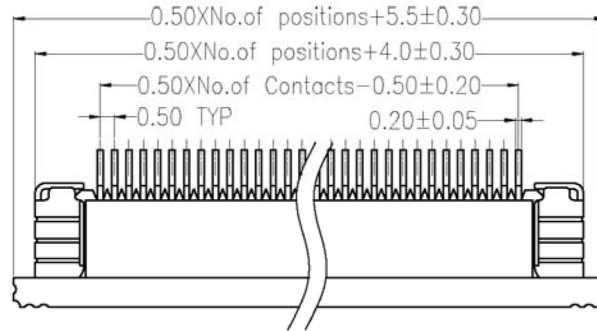

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE ± 0.05)

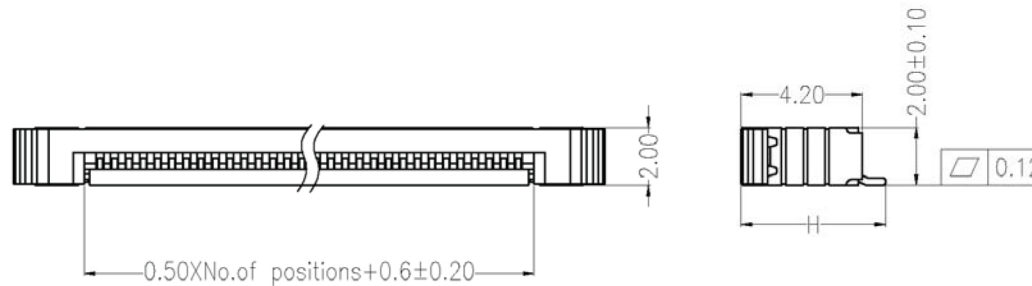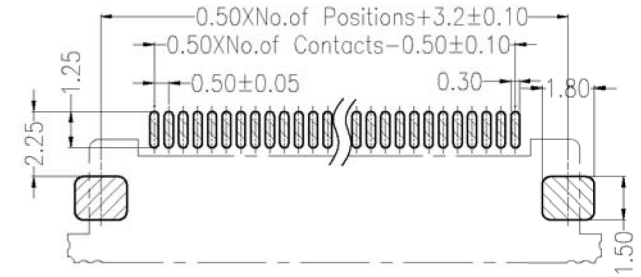

Dimensional & Ordering Information:

Circuit	Part No.	Dimension H
24	SEA8056-24	5.20
28	SEA8056-28	5.20
29	SEA8056-29	5.20
36	SEA8056-36	5.70
45	SEA8058-45	5.70

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION		DRAW	SCALE	3:1	
					X.X	± 0.40				
					X.XX	± 0.25	DESIGN		UNIT	mm
					X.XXX	± 0.15	CHECK		SIZE	A4
					Angle	$\pm 3'$	APPROVE		SHEET	1/1
					DIM	TOL	APPROVE		PROJ.	

Displaytech
 a seacomp company

Displaytech - a SEACOMP company
 5840 El Camino Real, Suite 108, Carlsbad, CA 92008
 www.displaytech-us.com
 sales@displaytech-us.com