



Electrical specifications

Center Frequency: 3100 MHz
Bandwidth: 20 MHz
VSWR: 15 dB min
Insertion Loss (F0): 5.0 dB max
Ripple in BW: 1.0 dB max
Input / Output Impedance: 50 Ohms
Rejection: 65dBc min at 3000MHz
Rejection 2: 65dBc min at 3200MHz
Power Handling: 30 dBm max

Mechanical


Mounting Method: SMT
Dimensions: 26.4 x 14 x 4.65 mm

Environmental

Operating Temperature: -40 C to 85 C
Storage Temperature: -55 C to +85 C

This product is RoHs compliant.

Outline Drawing:

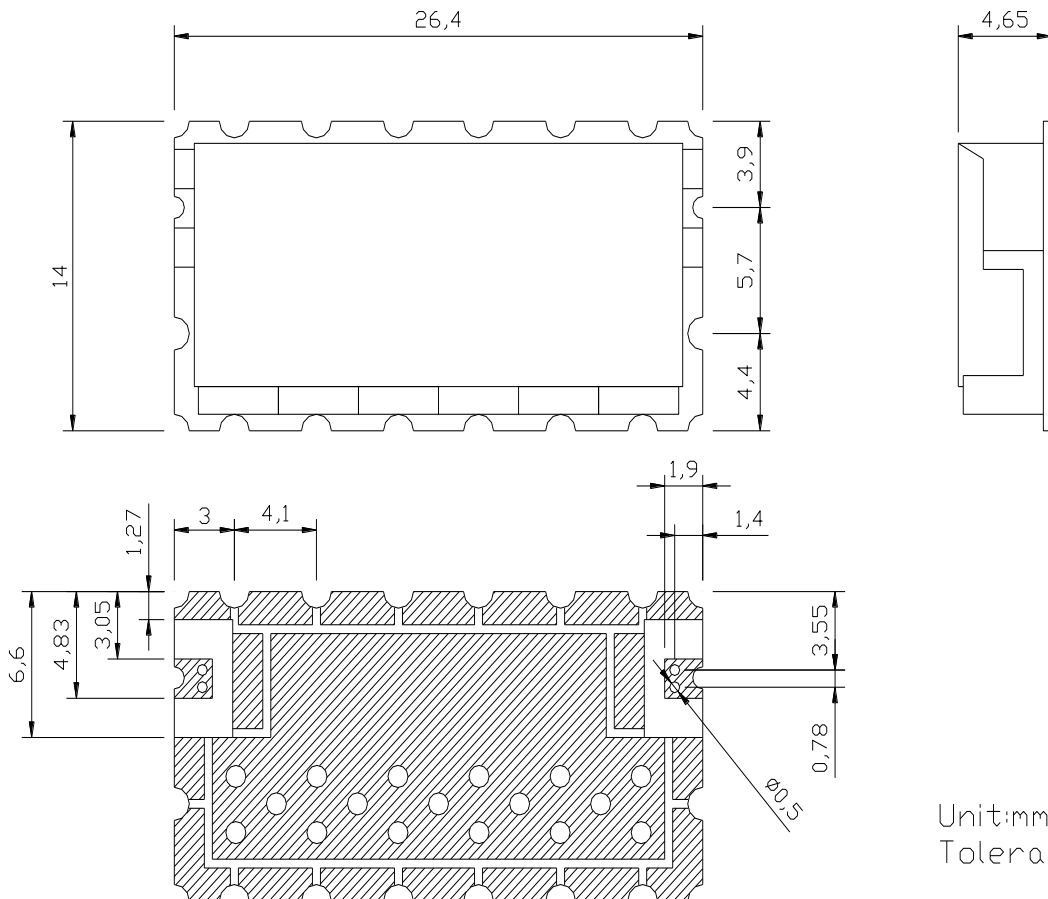

Unit:mm
Tolerance:±0.3