



Electrical specifications

Center Frequency: 1492.7 MHz
Bandwidth: 35.4 MHz
VSWR: 1.5 : 1
Input / Output Impedance: 50 Ohms
Passband: 1475-1510.4 MHz
Passband Insertion Loss: 4.0 dB max.
Passband Ripple: 1.0 dB max.
Rejection: 30 dB min at 1455 MHz
Rejection 2: 30 dB min at 1531MHz
Power Handling: 2 Watt

Mechanical


Mounting Method: SMT
Dimensions: 38 x 17 x 7.5 mm

Environmental

Operating Temperature: -10°C to 50°C
Storage Temperature: -50°C to +90°C

This product is RoHs compliant.

Outline Drawing:

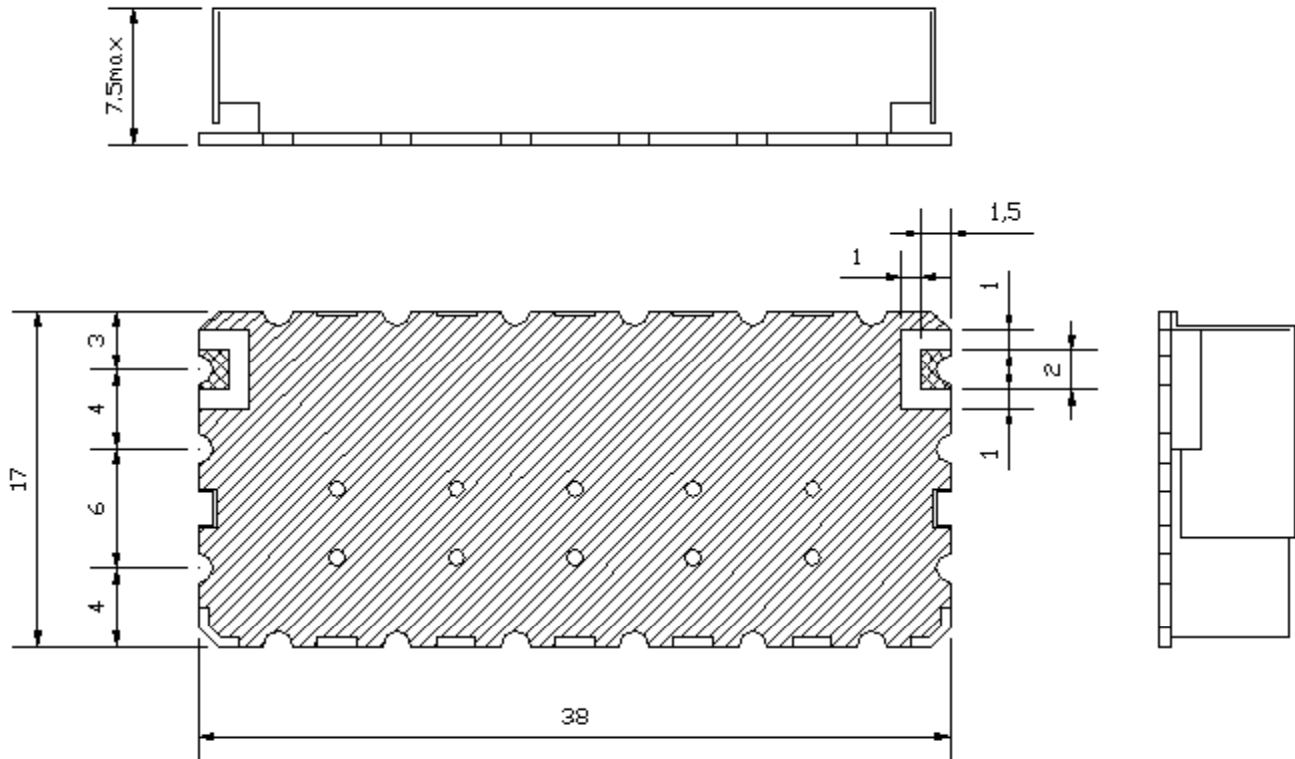

Unit:mm
Tolerance:±0.3