

PRODUCT FEATURES

- 100% Brocade Compatible 57-0000075-01
- Up to 10.3 Gb/s data links
- Hot-pluggable SFP+ transceiver module
- 10GBASE-SR/SW 10G Ethernet
- 10G Fibre Channel
- 850nm VCSEL laser transmitter
- PIN Receiver
- RoHS compliant and Lead Free
- Up to 300m on 50/125um MMF (OM3)
- Metal enclosure for lower EMI
- Duplex LC Connector
- Single 3.3V power supply
- Low power dissipation <0.8W
- Commercial operating temperature range: -0°C to 70°C
- GR-253-CORE Compliant
- Compliant with IEEE 802.3ae
- Compliant with SFP+ MSA SFF-8431



REGULATORY COMPLIANCE

- ESD to the Electrical PINs: compatible with MIL-STD-883E Method 3015.7
- ESD to the LC Receptacle: compatible with IEC 61000-4-2 GR-1089-CORE
- Immunity compatible with IEC 61000-4-2
- EMI compatible with FCC Part 15 Class B EN55022 Class B (CISPR 22B) VCCI Class B
- Laser Eye Safety compatible with FDA 21CFR 1040.10 and 1040.11 EN60950
- RoHS compliant with 2002/95/EC 4.1&4.2 2005/747/EC


PIN DESCRIPTIONS

| Pin | Symbol | Name/Description | Ref. |
|-----|------------|---|------|
| 1 | VeeT | Transmitter Ground (Common with Receiver Ground) | 1 |
| 2 | TX Fault | Transmitter Fault. LVTTTL -I/O | 2 |
| 3 | TX Disable | Transmitter Disable. Laser output disabled on high or open. LVTTTL-I | 3 |
| 4 | SDA | 2-Wire Serial Interface Data Line (Same as MOD-DEF2 in INF-8074i). LVTTTL-I/O | |
| 5 | SCL | 2-Wire Serial Interface Data Line (Same as MOD-DEF2 in INF-8074i). LVTTTL-I | |
| 6 | Mod_ABS | Module Absent, Connect to VeeT or VeeR in Module | 4 |
| 7 | RH0 | Rate Select 0, optionally controls SFP+ module receiver LVTTTL-I | 5 |
| 8 | LOS | Loss of Signal indication. Logic 0 indicates normal operation | 2 |
| 9 | RS1 | Rate Select 0, optionally controls SFP+ module receiver LVTTTL-I | 5 |
| 10 | VeeR | Receiver Ground (Common with Transmitter Ground) | 1 |
| 11 | VeeR | Receiver Ground (Common with Transmitter Ground) | 1 |
| 12 | RD- | Receiver Inverted DATA out. AC Coupled | |
| 13 | RD+ | Receiver Non-Inverted DATA out. AC Coupled | |
| 14 | VeeR | Receiver Ground (Common with Transmitter Ground) | 1 |
| 15 | VccR | Receiver Power Supply | |
| 16 | VccT | Transmitter Power Supply | |
| 17 | VeeT | Transceiver Ground (Common with Transmitter Ground) | 1 |
| 18 | TD+ | Transceiver Non-Inverted DATA in. AC Coupled | |
| 19 | TD- | Transmitter Inverted DATA in. AC Coupled | |
| 20 | VeeT | Transmitter Ground (Common with Receiver Ground) | 1 |


Notes:

1. The module signal ground contacts, VeeR and VeeT, should be isolated from the module case.
2. This contact is an open collector/drain output and should be pulled up to the Vcc_Host with resistor in the range 4.7KΩ to 10KΩ. Pull ups can be connected to one or several power supplies, however the host board design shall ensure that no module contact has voltage exceeding module VccT/R +0.5V.
3. Tx_Disable is an input contact with a 4.7KΩ to 10KΩ pull-up resistor to VccT inside module.
4. Mod_ABS is connected to VeeT or VeeR in the SFP+ module. The host may pull the contact up to Vcc_Host with a resistor in the range from 4.7KΩ to 10KΩ. Mod_ABS is asserted "High" when the SFP+ module is physically absent from a host slot.
5. RS0 and RS1 are module inputs and are pulled low to VeeT with > 30 kΩ resistors in the module. RS0 optionally selects the optical receive signaling rate coverage. RS1 optionally selects the optical transmit signaling rate coverage.

PIN-OUT OF CONNECTOR BLOCK ON HOST

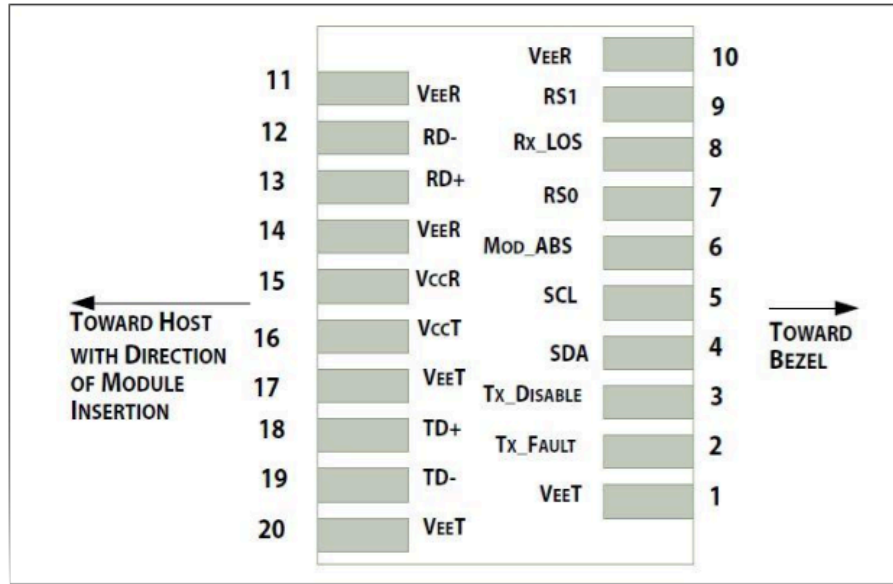

RECOMMENDED CIRCUIT SCHEMATIC

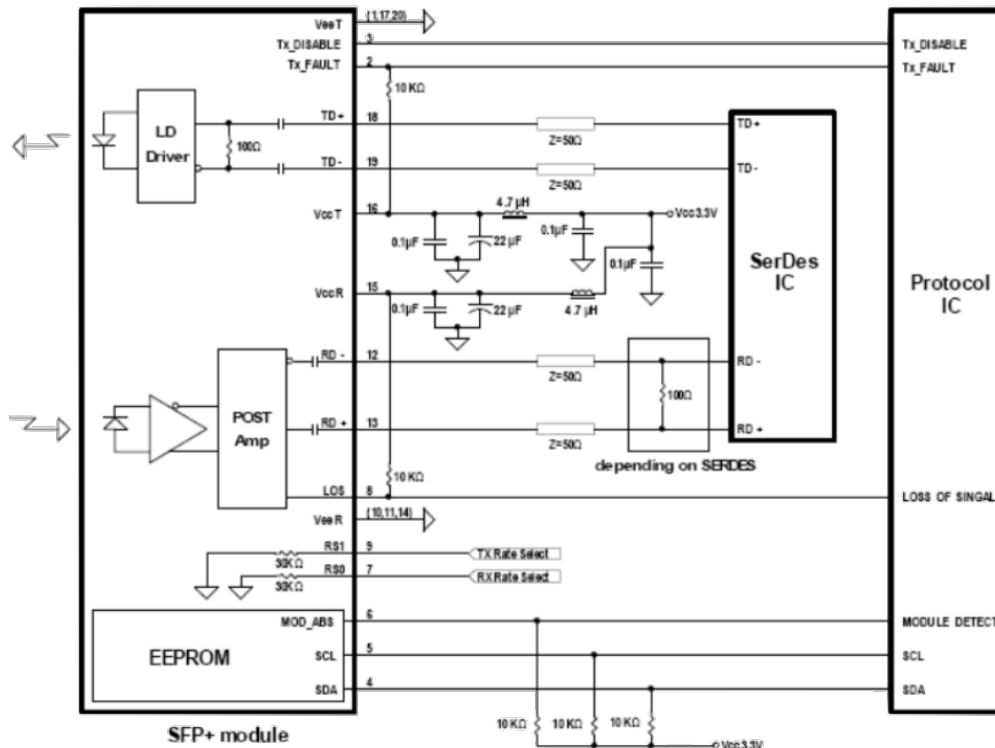

ABSOLUTE MAXIMUM RATING

| Parameter | Symbol | Min | Typ | Max | Unit | Ref. |
|------------------------|--------|------|-----|------|------|------|
| Maximum Supply Voltage | Vcc | -0.5 | - | +4.0 | V | |
| Storage Temperature | TS | -40 | - | +85 | °C | |
| Operating Humidity | RH | 5 | - | 85 | % | |

RECOMMENDED OPERATING CONDITIONS

| Parameter | Symbol | Min | Typ | Max | Unit | Ref. |
|----------------------------|--------|------|------|------|------|------|
| Power Supply Voltage | Vcc | 3.13 | 3.30 | 3.47 | V | |
| Power Supply Current | Icc | - | - | 300 | mA | |
| Case Operating Temperature | Tc | 0 | - | +70 | °C | |
| Data Rate | - | 9.95 | 10.5 | 10.5 | Gbps | |
| 50/125um MMF (OM3) | Lmax | - | - | 300 | m | |


ELECTRICAL CHARACTERISTICS (TOP=25°C, VCC=3.3Volts)

| Parameter | Symbol | Min | Typ | Max | Unit | Ref. |
|--------------------------------|----------|---------|-----|---------|------|------|
| Transmitter | | | | | | |
| Input differential impedance | Zin | 90 | 100 | 110 | Ω | |
| Differential data input swing | Vin, pp | 120 | 600 | 850 | mV | |
| TX Disable-High | - | 2.0 | - | Vcc+0.3 | V | |
| TX Disable-Low | - | Vee-0.3 | - | 0.8 | V | |
| TX Fault-High | - | 2.0 | - | Vcc+0.3 | V | |
| TX Fault-Low | - | Vee-0.3 | - | 0.8 | V | |
| Receiver | | | | | | |
| Single ended data output swing | Vout, pp | 300 | 600 | 850 | mV | |
| Output Differential Impedance | Zin | 90 | 100 | 110 | Ω | |
| LOS-High | - | 2.0 | - | Vcc+0.3 | V | |
| LOS-Low | - | Vee-0.3 | - | 0.8 | V | |

OPTICAL CHARACTERISTICS

| Parameter | Symbol | Min | Typ | Max | Unit |
|------------------------------------|-------------|------|-----|-------|-------|
| Transmitter | | | | | |
| Output Opt. Power | AOP | -5 | | -1 | dBm |
| Optical Modulation Amplitude | P(OMA) | -4.3 | -2 | | dBm |
| Extinction Ratio | ER | 3 | | | dB |
| Transmitter and Dispersion Penalty | TDP | | | 3.9 | dB |
| Average Launch Power of OFF TX | Poff | | | -45 | dBm |
| Optical Wavelength | λ | 840 | 850 | 860 | nm |
| Side mode Suppression Ratio | SMSR | 30 | | | dB |
| Optical Return Loss Tolerance | ORLT | | | 12 | dB |
| Relative Intensity Noise | RIN | | | -128 | dB/Hz |
| Transmitter Reflectance | | | | -12 | dB |
| Receiver | | | | | |
| RX Sensitivity | PIN | | | -11.1 | dBm |
| Overload | | -1 | | | dBm |
| Receiver Reflectance | | | | -12 | dB |
| Optical Center Wavelength | λ_C | 840 | 850 | 860 | nm |
| LOS Assert | | -30 | | | dBm |
| LOS De-Assert | | | | 13 | dBm |
| LOS Hysteresis | | 0.5 | | | dB |


MECHANICAL SPECIFICATIONS

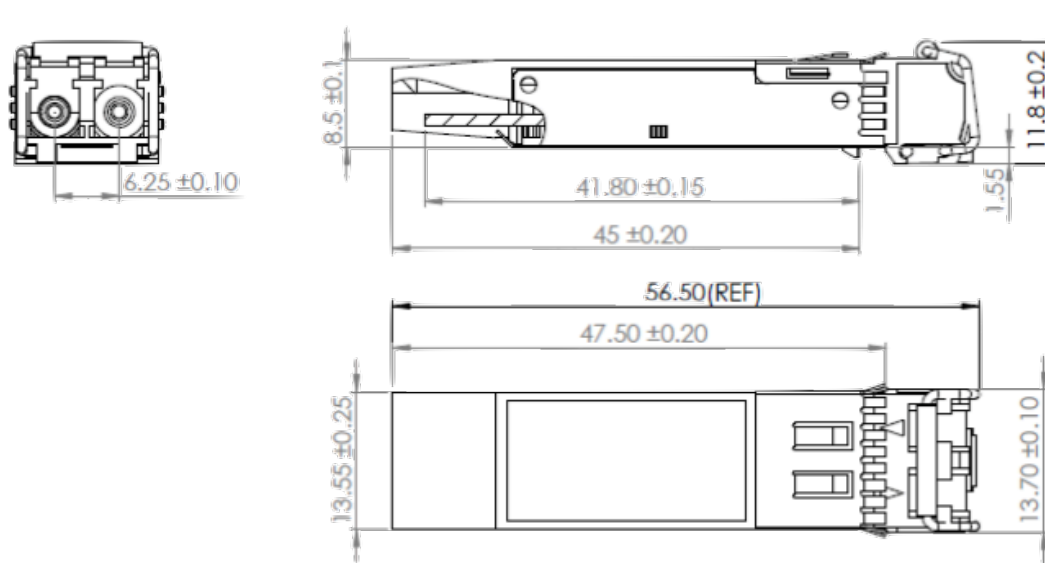

57-0000075-01-HPC

EEPROM INFORMATION

EEPROM memory map specific data field description is as below:

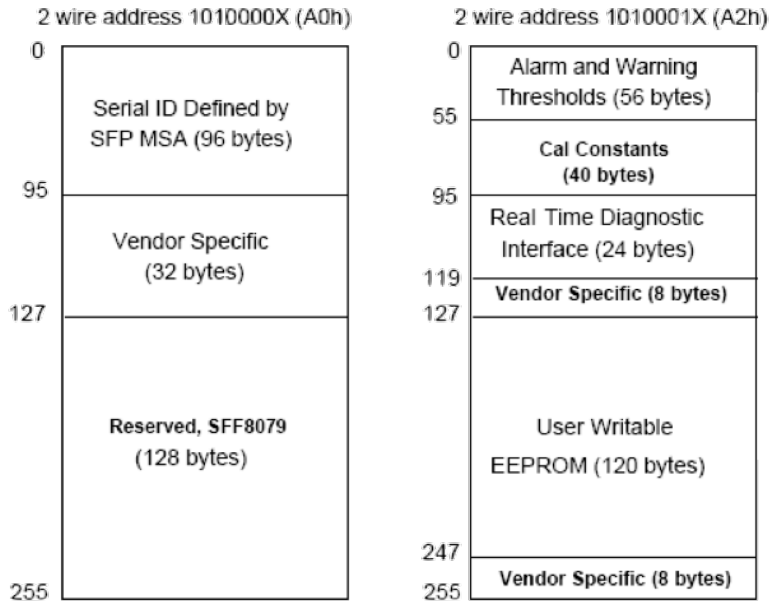

DIGITAL DIAGNOSTIC MONITORING INTERFACE

The digital diagnostic monitoring interface also defines another 256-byte memory map in EEPROM, which makes use of the 8 bit address 1010001X (A2h). The monitoring specification of this product is described in this table.

| Parameter | Range | Accuracy | Calibration |
|--------------|----------------|----------|-------------|
| Temperature | 0°C to 70°C | ±3°C | Internal |
| Voltage | 2.97 to 3.63V | ±3% | Internal |
| Bias Current | 0 to 100mA | ±10% | Internal |
| TX Power | -5 to 1dBm | ±2dB | Internal |
| RX Power | -11.1 to -1dBm | ±3dB | Internal |

ORDERING INFORMATION

| Part Number | Product Description |
|-------------------|--|
| 57-0000075-01-HPC | Brocade Compatible 10GBASE-SR SFP+ Transceiver |