

REV. 0
DCO 102280

COIL: @ 25°C	
RESISTANCE	300 OHMS ±10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	14.7 VDC
MUST RELEASE	1.8 VDC

ENVIRONMENT:


VIBRATION 10 CPS TO 2000 CPS @ 30 g's

SHOCK 100 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE & RELEASE 10 MS MAX.
OPERATE BOUNCE 5 MS MAX.
RELEASE BOUNCE 5 MS MAX.

CUSTOMER DATA SHEET

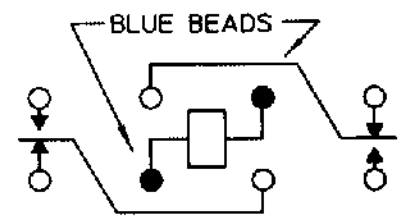

TERMINAL VIEW

CONTACT RATING: 10 AMPS 28 VDC
RESISTIVE 100,000 OPERATIONS

DR. B.D. 1/27/00 CK. 69H 1/27/00



CUST. C. I. I. STD
CUST. NO. REV.

'07' RELAY

B07B112CC1