


|                                     |            |                  |            |
|-------------------------------------|------------|------------------|------------|
| MDT1010GIH-HDMI                     | 1280 x 800 | HDMI Interface   | TFT Module |
| (MCT101HDMI-A) <b>Specification</b> |            |                  |            |
| Version: 1                          |            | Date: 22/06/2019 |            |
| <b>Revision</b>                     |            |                  |            |
| 1                                   | 21/06/2019 | First issue      |            |

| Display Features      |                           |  |                  |
|-----------------------|---------------------------|---|------------------|
| Display Size          | 10.10"                    |   |                  |
| Resolution            | 1280 x 800                |   |                  |
| Orientation           | Landscape                 |   |                  |
| Appearance            | RGB                       |   |                  |
| Logic Voltage         | 5V                        |   |                  |
| Interface             | HDMI                      |   |                  |
| Brightness            | 1100 cd/m <sup>2</sup>    |   |                  |
| Touchscreen           | ---                       |   |                  |
| Module Size           | 230.56 x 155.01 x 25.60mm |   |                  |
| Operating Temperature | -20°C ~ +70°C             |   |                  |
| Pinout                | 40 Way Connector          |   | Box Quantity     |
| Pitch                 | ---                       |   | Weight / Display |

\* - For full design functionality, please use this specification in conjunction with the TFP401 specification. (Provided Separately)

| Display Accessories |                             |
|---------------------|-----------------------------|
| Part Number         | Description                 |
| MCIB-HDMI/HDMI      | Male To Male HDMI Connector |

| Optional Variants                               |         |
|---|---------|
| Appearances                                     | Voltage |
| Capacitive Touch Panel<br>Resistive Touch Panel |         |



## Summary

TFT 10.1" is a IPS transmissive type color active matrix TFT liquid crystal display . In-Plane Switching (IPS) was one of the first refinements to produce significant gains in the light-transmissive characteristics of TFT panels. It is a technology that addresses the two main issues of a standard twisted nematic (TN) TFT display: colour and viewing angle.

## General Specifications

- Screen Diagonal: 10.1 inch
- Number of Pixels: 1280 x 3(RGB) x 800 dots
- Module dimension: 230.56 x 155.01 x 25.6 mm
- Active area: 216.96 (H) x 135.6(V) mm
- Pixel pitch: 0.1695 x 0.1695 mm
- Display Mode: Normally Black
- Pixel Arrangement: R.G.B. Vertical Stripe
- Backlight Type: LED, Normally White
- Aspect Ratio: 16:9
- Electrical Interface (Logic): HDMI
- With /Without TP: Without TP
- Surface: Anti-Glare

\*Color tone slight changed by temperature and driving voltage.



# Interface

## . CON6

| Pin No. | Symbol | Function  | Remark |
|---------|--------|---|--------|
| 1       | 3.3V   | TFT Module Power limit can only output 3.3V,100mA | Note1  |
| 2       | 5V     | Raspberry Pi:Power 5V                             |        |
| 3       | GPIO02 | Raspberry Pi:GPIO02                               |        |
| 4       | 5V     | Raspberry Pi:Power 5V                             |        |
| 5       | GPIO03 | Raspberry Pi:GPIO03                               |        |
| 6       | GND    | Raspberry Pi:GND                                  |        |
| 7       | GPIO04 | Raspberry Pi:GPIO04                               |        |
| 8       | GPIO14 | Raspberry Pi:GPIO14                               |        |
| 9       | GND    | Raspberry Pi:GND                                  |        |
| 10      | GPIO15 | Raspberry Pi:GPIO15                               |        |
| 11      | GPIO17 | Raspberry Pi:GPIO17                               |        |
| 12      | GPIO18 | Raspberry Pi:GPIO18 (Backlight Enable)            |        |
| 13      | GPIO27 | Raspberry Pi:GPIO27                               |        |
| 14      | GND    | Raspberry Pi:GND                                  |        |
| 15      | GPIO22 | Raspberry Pi:GPIO22                               |        |
| 16      | GPIO23 | Raspberry Pi:GPIO23                               |        |
| 17      | 3.3V   | TFT Module Power limit can only output 3.3V,100mA | Note1  |
| 18      | GPIO24 | Raspberry Pi:GPIO24                               |        |
| 19      | GPIO10 | Raspberry Pi:GPIO10                               |        |
| 20      | GND    | Raspberry Pi:GND                                  |        |
| 21      | GPIO09 | Raspberry Pi:GPIO09                               |        |
| 22      | GPIO25 | Raspberry Pi:GPIO25                               |        |
| 23      | GPIO11 | Raspberry Pi:GPIO11                               |        |
| 24      | GPIO08 | Raspberry Pi:GPIO08                               |        |
| 25      | GND    | Raspberry Pi:GND                                  |        |
| 26      | GPIO07 | Raspberry Pi:GPIO07                               |        |
| 27      | ID_SD  | Raspberry Pi:ID_SD                                |        |
| 28      | ID_SC  | Raspberry Pi:ID_SC                                |        |
| 29      | GPIO05 | Raspberry Pi:GPIO05                               |        |
| 30      | GND    | Raspberry Pi:GND                                  |        |
| 31      | GPIO06 | Raspberry Pi:GPIO06                               |        |
| 32      | GPIO12 | Raspberry Pi:GPIO12                               |        |



|    |        |                     |  |
|----|--------|---------------------|--|
| 33 | GPIO13 | Raspberry Pi:GPIO13 |  |
| 34 | GND    | Raspberry Pi:GND    |  |
| 35 | GPIO19 | Raspberry Pi:GPIO19 |  |
| 36 | GPIO16 | Raspberry Pi:GPIO16 |  |
| 37 | GPIO26 | Raspberry Pi:GPIO26 |  |
| 38 | GPIO20 | Raspberry Pi:GPIO20 |  |
| 39 | GND    | Raspberry Pi:GND    |  |
| 40 | GPIO21 | Raspberry Pi:GPIO21 |  |

Note1: The 3.3V supply current is limited; please pay special attention to use

MIDAS  
design • manufacture • supply



**CON5**

| Pin No. | Symbol | Function                               | Remark |
|---------|--------|--|--------|
| 1       | NC     | No connection                          |        |
| 2       | 5V     | Raspberry Pi:Power 5V                  |        |
| 3       | GPIO02 | Raspberry Pi:GPIO02                    |        |
| 4       | 5V     | Raspberry Pi:Power 5V                  |        |
| 5       | GPIO03 | Raspberry Pi:GPIO03                    |        |
| 6       | GND    | Raspberry Pi:GND                       |        |
| 7       | GPIO04 | Raspberry Pi:GPIO04                    |        |
| 8       | GPIO14 | Raspberry Pi:GPIO14                    |        |
| 9       | GND    | Raspberry Pi:GND                       |        |
| 10      | GPIO15 | Raspberry Pi:GPIO15                    |        |
| 11      | GPIO17 | Raspberry Pi:GPIO17                    |        |
| 12      | GPIO18 | Raspberry Pi:GPIO18 (Backlight Enable) |        |
| 13      | GPIO27 | Raspberry Pi:GPIO27                    |        |
| 14      | GND    | Raspberry Pi:GND                       |        |
| 15      | GPIO22 | Raspberry Pi:GPIO22                    |        |
| 16      | GPIO23 | Raspberry Pi:GPIO23                    |        |
| 17      | NC     | No connection                          |        |
| 18      | GPIO24 | Raspberry Pi:GPIO24                    |        |
| 19      | GPIO10 | Raspberry Pi:GPIO10                    |        |
| 20      | GND    | Raspberry Pi:GND                       |        |
| 21      | GPIO09 | Raspberry Pi:GPIO09                    |        |
| 22      | GPIO25 | Raspberry Pi:GPIO25                    |        |
| 23      | GPIO11 | Raspberry Pi:GPIO11                    |        |
| 24      | GPIO08 | Raspberry Pi:GPIO08                    |        |
| 25      | GND    | Raspberry Pi:GND                       |        |
| 26      | GPIO07 | Raspberry Pi:GPIO07                    |        |
| 27      | ID_SD  | Raspberry Pi:ID_SD                     |        |
| 28      | ID_SC  | Raspberry Pi:ID_SC                     |        |
| 29      | GPIO05 | Raspberry Pi:GPIO05                    |        |
| 30      | GND    | Raspberry Pi:GND                       |        |
| 31      | GPIO06 | Raspberry Pi:GPIO06                    |        |
| 32      | GPIO12 | Raspberry Pi:GPIO12                    |        |
| 33      | GPIO13 | Raspberry Pi:GPIO13                    |        |



|    |        |                     |  |
|----|--------|---------------------|--|
| 34 | GND    | Raspberry Pi:GND    |  |
| 35 | GPIO19 | Raspberry Pi:GPIO19 |  |
| 36 | GPIO16 | Raspberry Pi:GPIO16 |  |
| 37 | GPIO26 | Raspberry Pi:GPIO26 |  |
| 38 | GPIO20 | Raspberry Pi:GPIO20 |  |
| 39 | GND    | Raspberry Pi:GND    |  |
| 40 | GPIO21 | Raspberry Pi:GPIO21 |  |

## HDMI

| Pin No. | Symbol | I/O | Function                        | Remark |
|---------|--------|-----|---------------------------------|--------|
| 1       | Rx2+   | I   | +LVDS Differential Data Input   |        |
| 2       | GND    | P   | Ground                          |        |
| 3       | Rx2-   | I   | -LVDS Differential Data Input   |        |
| 4       | Rx1+   | I   | +LVDS Differential Data Input   |        |
| 5       | GND    | P   | Ground                          |        |
| 6       | Rx1-   | I   | -LVDS Differential Data Input   |        |
| 7       | Rx0+   | I   | +LVDS Differential Data Input   |        |
| 8       | GND    | P   | Ground                          |        |
| 9       | Rx0-   | I   | -LVDS Differential Data Input   |        |
| 10      | RxC+   | I   | +LVDS Differential Clock Input  |        |
| 11      | GND    | P   | Ground                          |        |
| 12      | RxC-   | I   | -LVDS Differential Clock Input  |        |
| 13-14   | NC     | -   | No connection                   |        |
| 15      | SCL    | I/O | DDC(Data Display Channel) Clock |        |
| 16      | SDA    | I/O | DDC(Data Display Channel) Data  |        |
| 17      | GND    | P   | Ground                          |        |
| 18      | 5V     | P   | Power Supply                    |        |
| 19      | Detect | I/O | Hot plug detect                 |        |



I: input, O: output, P: Power

## POWER-JACK

| Pin No. | Symbol | I/O | Function          | Remark |
|---------|--------|-----|-------------------|--------|
| 1       | 5V     | P   | Power Supply (5V) |        |
| 2       | GND    | P   | Ground            |        |
| 3       | NC     | -   | No connection     |        |



# Contour Drawing

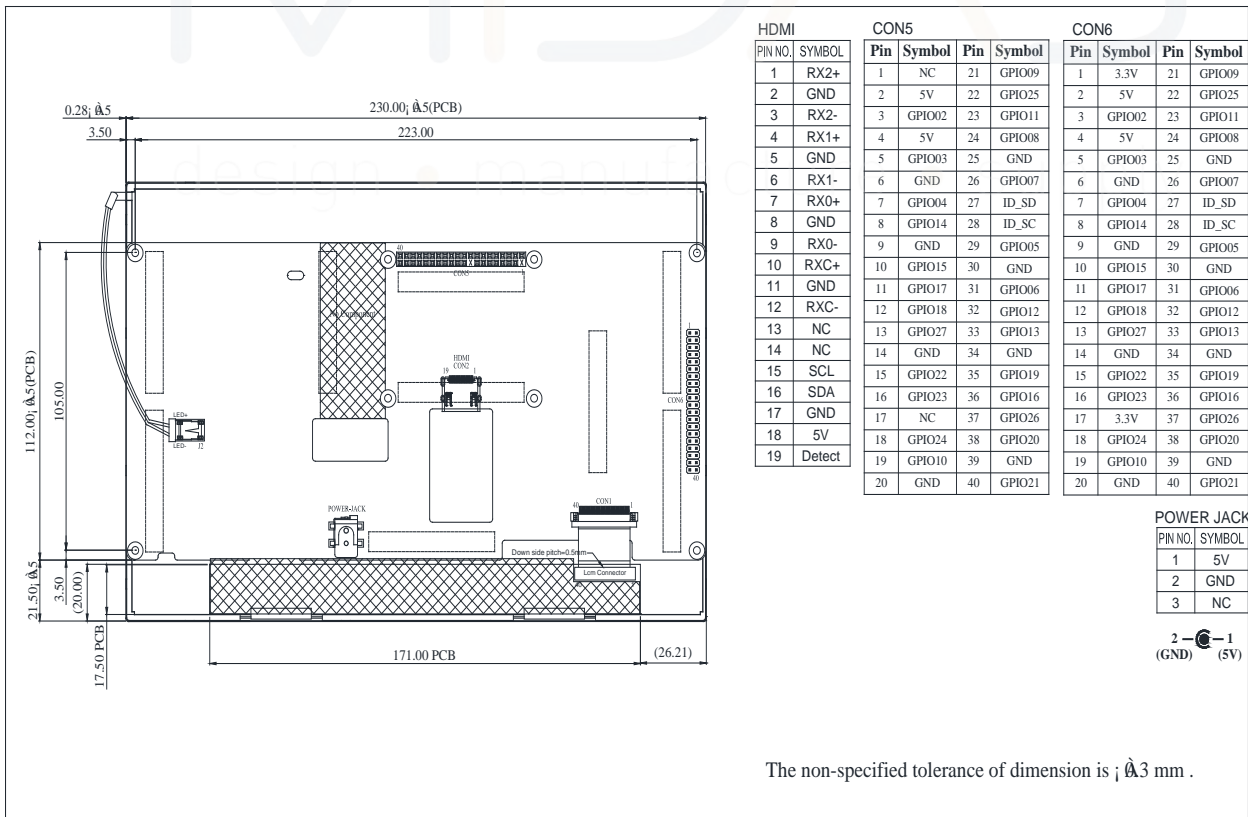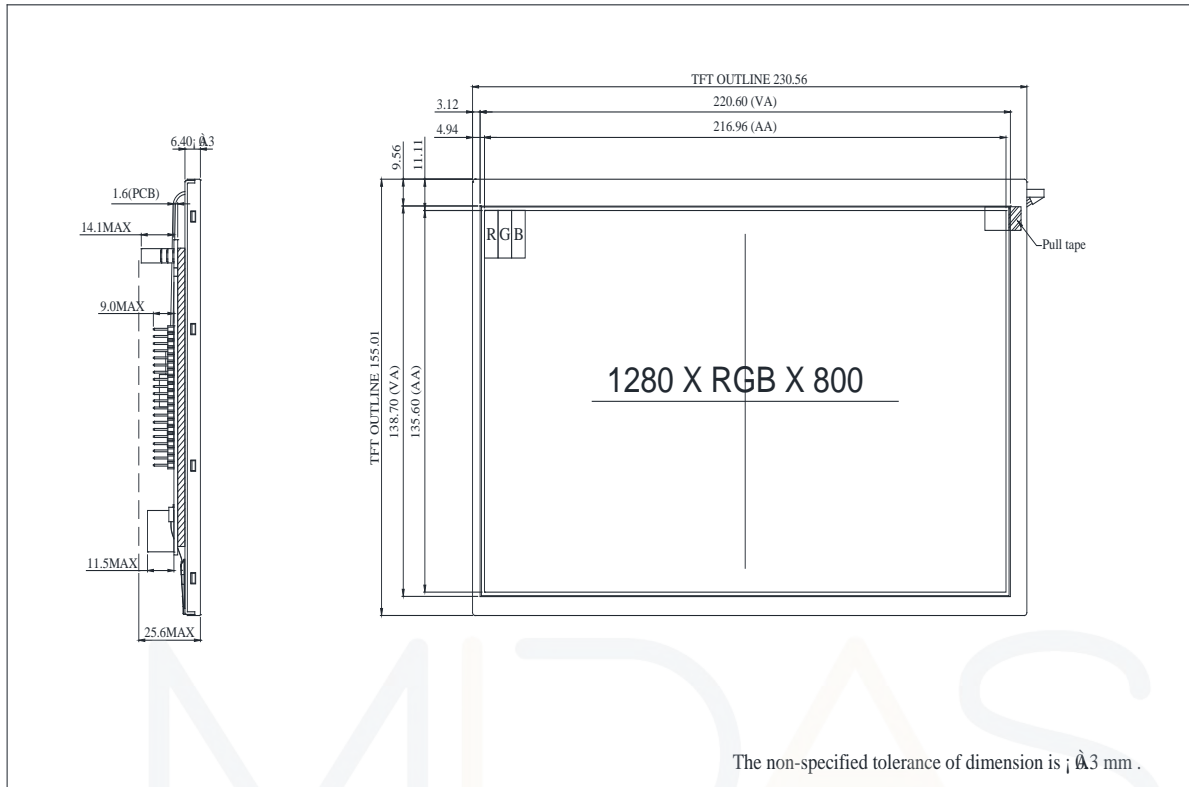

## Absolute Maximum Ratings

| Item                  | Symbol | Min | Typ | Max | Unit |
|-----------------------|--------|-----|-----|-----|------|
| Operating Temperature | TOP    | -20 | —   | +70 | °C   |
| Storage Temperature   | TST    | -20 | —   | +70 | °C   |

Note: Device is subject to be damaged permanently if stresses beyond those absolute maximum ratings listed above

1. Temp.  $\leq 60^{\circ}\text{C}$ , 90% RH MAX. Temp.  $> 60^{\circ}\text{C}$ , Absolute humidity shall be less than 90% RH at  $60^{\circ}\text{C}$

## Electrical Characteristics

### 1. Operating conditions:

| Item                   | Symbol | Condition | Min   | Typ | Max | Unit | Remark |
|------------------------|--------|-----------|-------|-----|-----|------|--------|
| Supply Voltage For LCM | VDD    | —         | 4.9   | 5   | 5.1 | V    | —      |
| Supply Current For LCM | IDD    | —         | —     | 1.9 | 2.7 | A    | Note 1 |
| LED life time          | —      | —         | 50000 | —   | —   | Hr   | Note 3 |

Note 1 : This value is test for VDD =5.0V , Ta=25°C only

Note 2 : Display with Raspberry pi the driver power is over USB , first make sure you have a 3A power supply, with a good quality USB cable, a thin wire power cable is no good. Make sure its 24AWG or smaller, shorter USB cables are better too.

Note 3: The “LED life time” is defined as the module brightness decrease to 50% original brightness at Ta=25°C and IL =480mA. The LED lifetime could be decreased if operating IL is lager than 480mA.






# LVDS Signal Timing Characteristics


## AC Electrical Characteristics

| Parameter                                      | Symbol | Values |      |      | Unit | Remark      |
|--|--------|--------|------|------|------|-------------|
|  |        | Min.   | Typ. | MAX. |      |             |
| LVDS Differential input high Threshold voltage | RxVTH  | -      | -    | +100 | mV   | RXVCM=1.2 V |
| LVDS Differential input low Threshold voltage  | RxVTL  | -100   | -    | -    | mV   |             |
| LVDS Differential input common mode voltage    | RxVCM  | 0.7    | -    | 1.6  | V    |             |
| LVDS Differential voltage                      | VID    | 200    | -    | 600  | mV   |             |

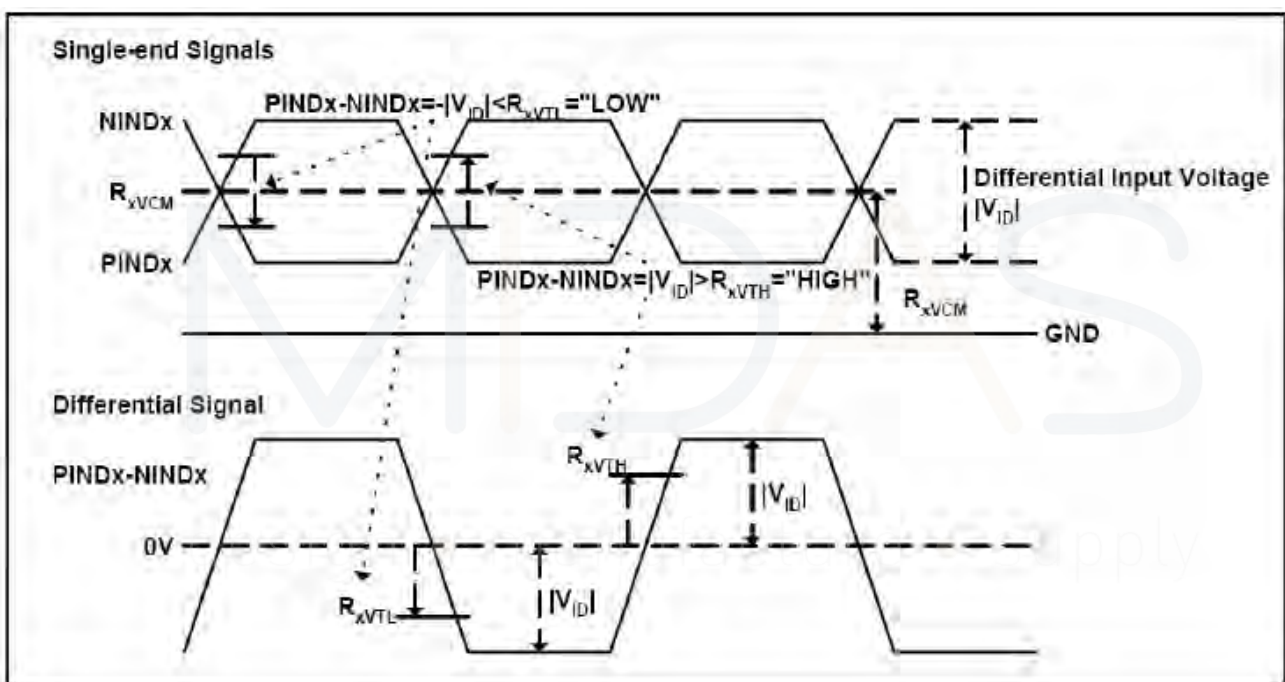


### Timing Table

| Parameter                            | Symbol  | Value |      |      | Unit | Remark           |
|--------------------------------------|---|-------|------|------|------|------------------|
|                                      |   | Min.  | Typ. | Max. |      |                  |
| Clock Frequency                      | 1/Tc  | 68.9  | 71.1 | 73.4 | Mhz  | Frame rate =60Hz |
| Horizontal display area              | thd   | 1280  |      |      | Tc   |                  |
| HS period time                       | th  | 1410  | 1440 | 1470 | Tc   |                  |
| HS Width +Back Porch<br>+Front Porch | t <sub>HW</sub> + t <sub>HBP</sub><br>+t <sub>HFP</sub> | 60    | 160  | 190  | Tc   |                  |
| Vertical display area                | tvd   | 800   |      |      | tH   |                  |
| VS period time                       | tv  | 815   | 823  | 833  | tH   |                  |
| VS Width +Back Porch<br>+Front Porch | t <sub>VW</sub> + t <sub>VBP</sub><br>+t <sub>VFP</sub> | 15    | 23   | 33   | tH   |                  |

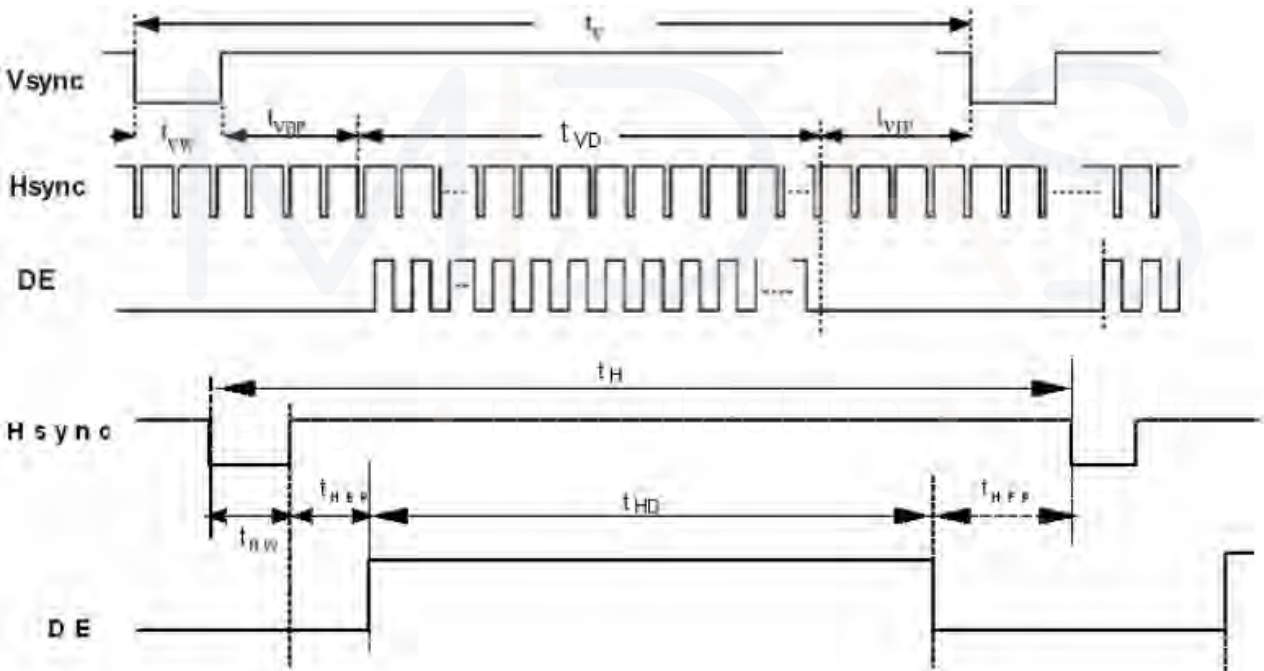

## LVDS Data Input Format

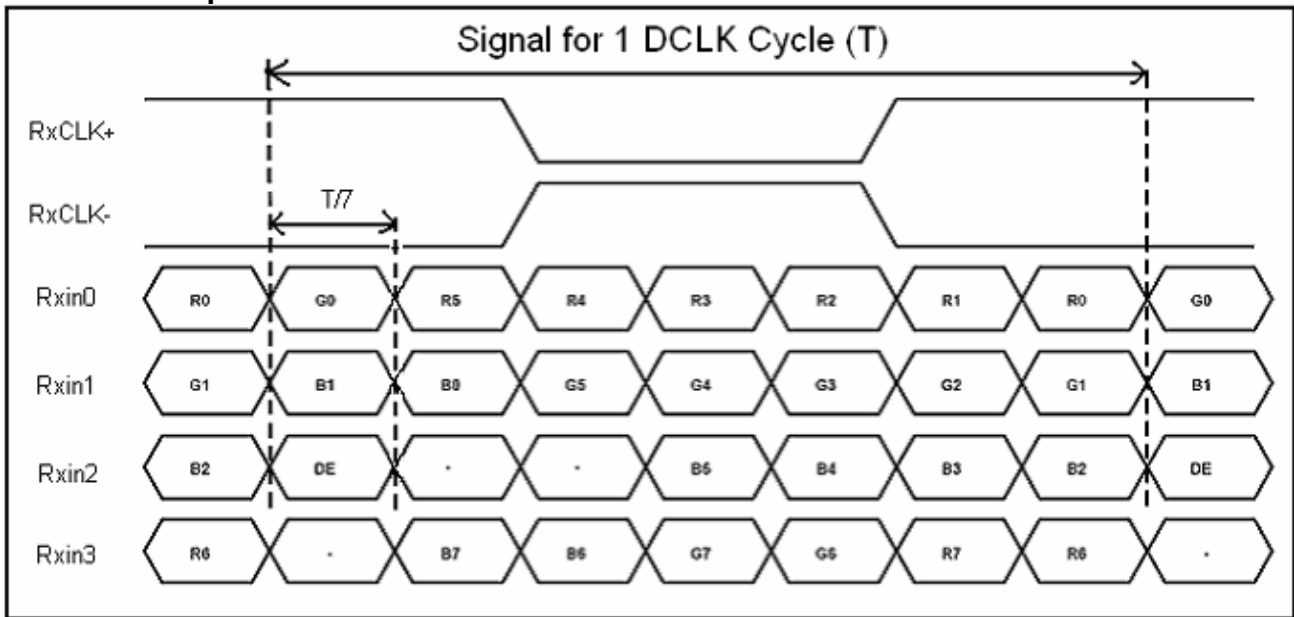

# MIDAS

design • manufacture • supply



## Optical Characteristics

| Item               | Symbol | Condition.                        | Min        | Typ. | Max. | Unit              | Remark            |          |
|--------------------|--------|-----------------------------------|------------|------|------|-------------------|-------------------|----------|
| Response time      | Tr     | $\theta=0^\circ$ 、 $\Phi=0^\circ$ | -          | 10   | 20   | .ms               | Note 3            |          |
|                    | Tf     |                                   | -          | 15   | 30   |                   |                   |          |
| Contrast ratio     | CR     | At optimized viewing angle        | 600        | 800  | -    | -                 | Note 4            |          |
| Color Chromaticity | White  | $\theta=0^\circ$ 、 $\Phi=0$       | Wx         | 0.26 | 0.31 | 0.36              | -                 | Note 2,5 |
|                    |        |                                   | Wy         | 0.28 | 0.33 | 0.38              | -                 |          |
| Viewing angle      | Hor.   | $CR \geq 10$                      | $\Theta_R$ | 75   | 85   | -                 | Deg.              | Note 1   |
|                    |        |                                   | $\Theta_L$ | 75   | 85   | -                 |                   |          |
|                    | Ver.   |                                   | $\Phi_T$   | 75   | 85   | -                 |                   |          |
|                    |        |                                   | $\Phi_B$   | 75   | 85   | -                 |                   |          |
| Brightness         | -      | -                                 | 1000       | 1100 | -    | cd/m <sup>2</sup> | Center of display |          |
| Uniformity         | (U)    | -                                 | 70         | -    | -    | %                 | Note5             |          |

Ta=25±2°C

Note 1: Definition of viewing angle range

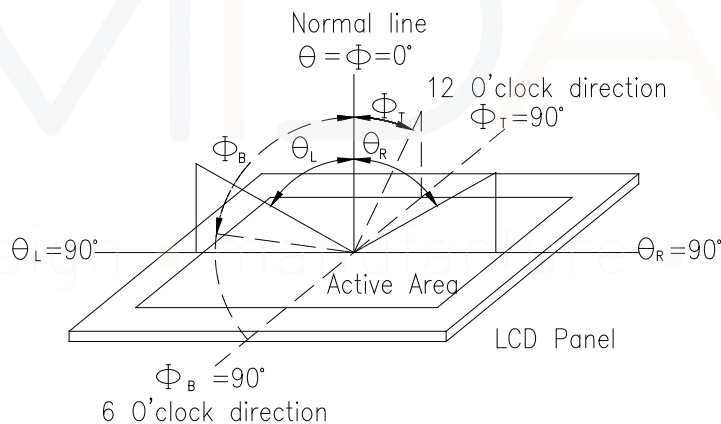


Fig. 9.1. Definition of viewing angle

Note 2: Test equipment setup:

After stabilizing and leaving the panel alone at a driven temperature for 10 minutes, the measurement should be executed. Measurement should be executed in a stable, windless, and dark room. Optical specifications are measured by Topcon BM-7 or BM-5 luminance meter 1.0° field of view at a distance of 50cm and normal direction.


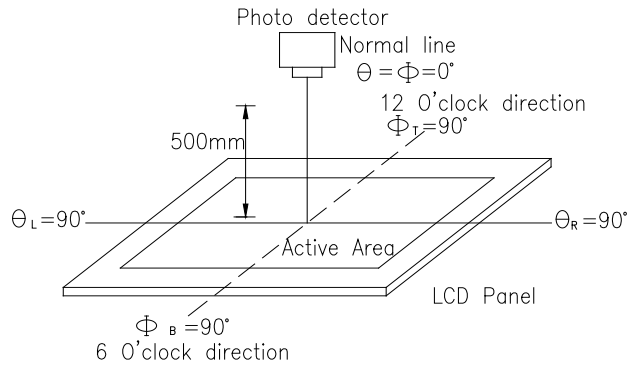


Fig. 9.2. Optical measurement system setup

Note 3: Definition of Response time:

The response time is defined as the LCD optical switching time interval between "White" state and "Black" state. Rise time,  $T_r$ , is the time between photo detector output intensity changed from 90% to 10%. And fall time,  $T_f$ , is the time between photo detector output intensity changed from 10% to 90%

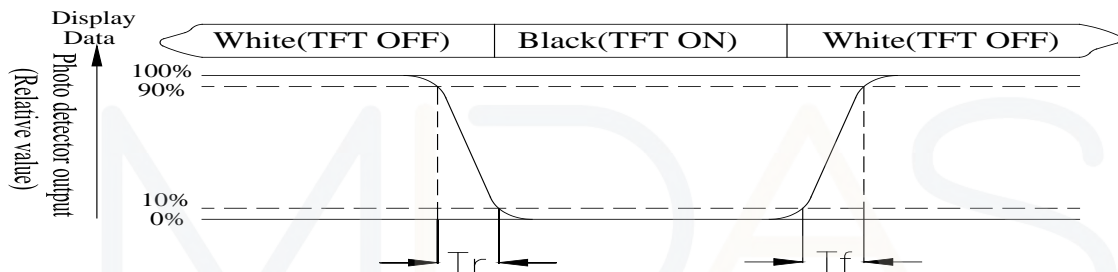

Note 4: Definition of contrast ratio:

The contrast ratio is defined as the following expression.

$$\text{Contrast ratio (CR)} = \frac{\text{Luminance measured when LCD on the "White" state}}{\text{Luminance measured when LCD on the "Black" state}}$$



Note 5: Definition of Luminance Uniformity

Active area is divided into 9 measuring areas (reference the picture in below). Every measuring point is placed at the center of each measuring area.

Luminance Uniformity (U) =  $L_{min}/L_{max} \times 100\%$

L = Active area length

W = Active area width

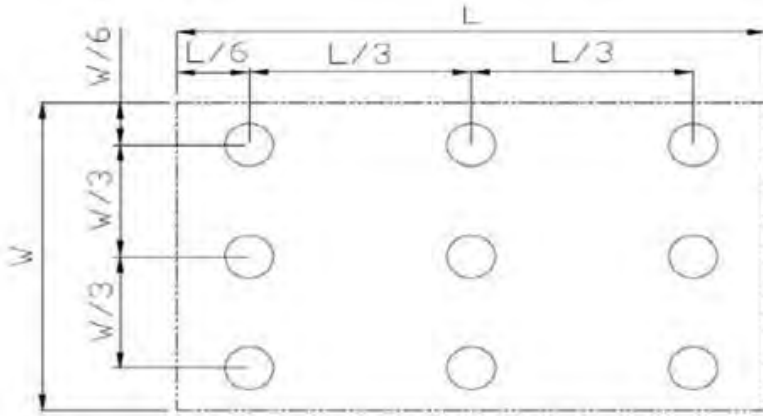


Fig 9.3. Definition of uniformity

Note 6: Definition of color chromaticity (CIE 1931)

Color coordinates measured at the center point of LCD

Note 7: Measured at the center area of the panel when all the input terminals of LCD panel are electrically opened.

design • manufacture • supply



# Reliability

Content of Reliability Test (Wide temperature, -20°C~70°C)

| Environmental Test                   |  |   |      |
|--------------------------------------|--|---|------|
| Test Item                            | Content of Test  | Test Condition  | Note |
| High Temperature storage             | Endurance test applying the high storage temperature for a long time.  | 70°C<br>200hrs  | 2    |
| Low Temperature storage              | Endurance test applying the low storage temperature for a long time.   | -20°C<br>200hrs   | 1,2  |
| High Temperature Operation           | Endurance test applying the electric stress (Voltage & Current) and the thermal stress to the element for a long time.   | 70°C<br>200hrs  | —    |
| Low Temperature Operation            | Endurance test applying the electric stress under low temperature for a long time.   | -20°C<br>200hrs   | 1    |
| High Temperature/ Humidity Operation | The module should be allowed to stand at 60°C,90%RH max  | 60°C,90%RH<br>96hrs   | 1,2  |
| Thermal shock resistance             | The sample should be allowed stand the following 10 cycles of operation<br><div style="text-align: center;"> <p style="margin: 0;">-20°C    25°C    70°C</p> <p style="margin: 0;">30min    5min    30min</p> <p style="margin: 0;">1 cycle</p> </div> | -20°C/70°C<br>10 cycles   | —    |
| Vibration test                       | Endurance test applying the vibration during transportation and using.   | Total fixed amplitude : 1.5mm<br>Vibration Frequency : 10~55Hz<br>One cycle 60 seconds to 3 directions of X,Y,Z for Each 15 minutes | 3    |
| Static electricity test              | Endurance test applying the electric stress to the terminal.   | VS=±600V(contact)<br>,<br>±800v(air),<br>RS=330Ω<br>CS=150pF<br>10 times  | —    |

Note1: No dew condensation to be observed.

Note2: The function test shall be conducted after 4 hours storage at the normal Temperature and humidity after remove from the test chamber.

Note3: The packing have to including into the vibration testing.

