



ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

- \$&A <n'7 Uj]mi6 UbXdUgg':]HYf'

DUfhBi a VYf. '5 9- \$86 % +(



9`YWf]WU`gdYWZ]WUhcbg`

Z`Yei YbWn` 890-915 MHz
-bgYfhjcb`cgg. `1.0 dB
F`Yhi fb`cgg. 19 dB
F`Y`YW]cb. `85 dB min@935-960 MHz
HF9`Jj`FI`fX6`L`fa`U`L`30±1.0 dB`


A`YW`Ub]WU`

A`ci`bh]b[`A`Yh`cX.`Threaded Mounting Holes`
7`cbb`YW]cf`HndY.`N-Type F (Out)
SMA F (In)
SMA F (Monitoring Port)
8`ja`Ybg]cbg. 3.93" x 8.14" x 1.87" in

9`bj`]f`cba`YbHJ`

CdYfU]b[`HYa`dYfUi`fY.`-45 to +85° C
GhcfU]`YHYa`dYfUi`fY.`-55 to +95° C
G`cW`. `20 G. 11ms
J]VfU]cb. 20 G. 5 to 200 MHz

Ci`h]bY`8`fUk`]b[`.`

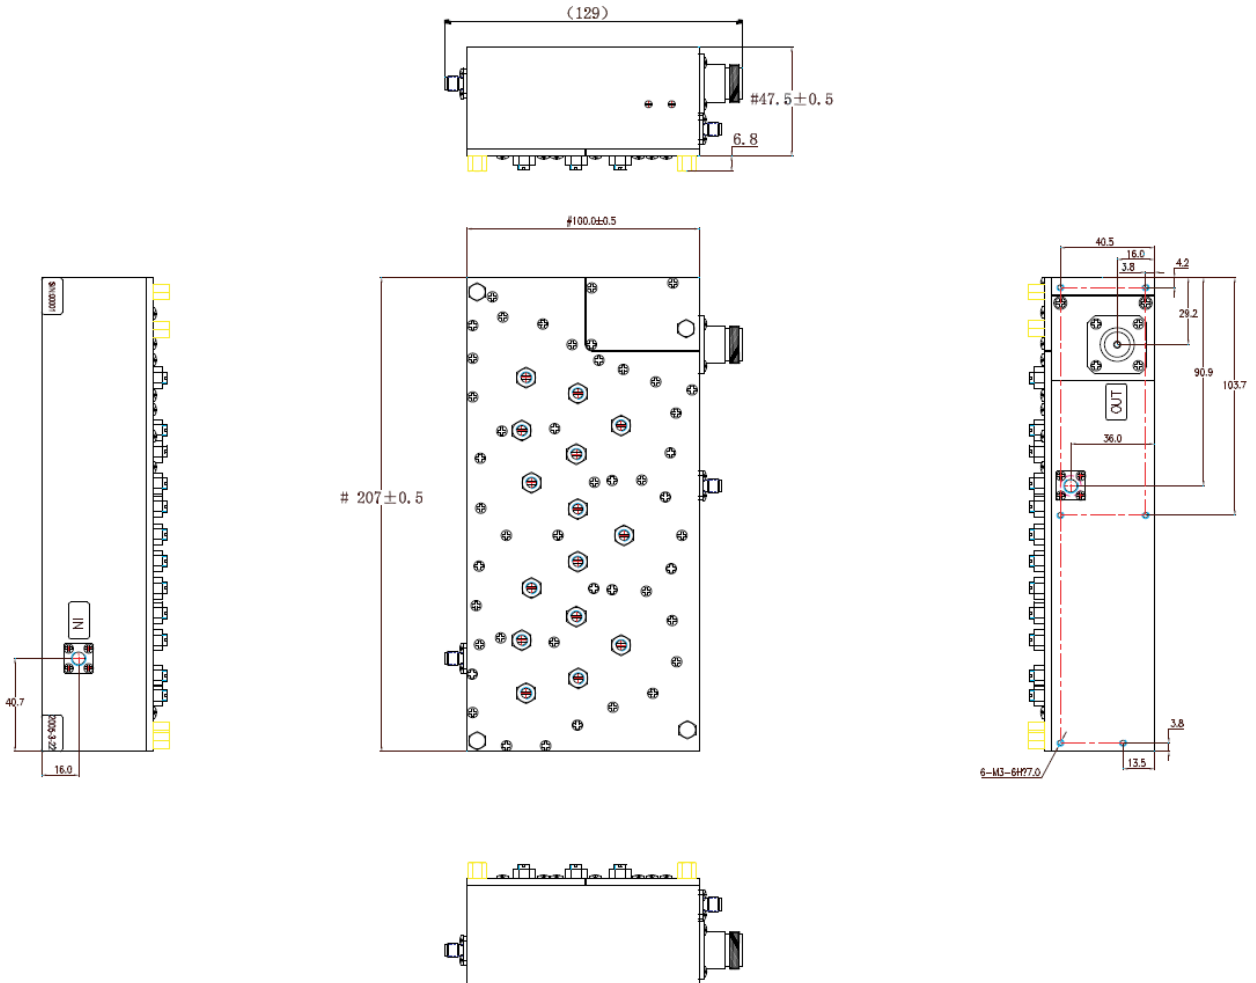

+\$`Ci`Ik`Uhf`@`bY` D\`cbY.`ft`+`L`++&l`(&`&`
;`UfZ]Y`XZB>`\$+\$&*` :`U``ft`+`L`++&l`(*`(*`

9a`U]`.`gU`Yg4`UbU]W`Y`YW]cb]W]Vt`a`
`K`YV`.`kk`k`UbU]W`Y`YW]cb]W]Vt`a`.....