


REV. 1 8/25/98

COIL: @ 25°C	
RESISTANCE	100 OHMS ± 10%
NOMINAL VOLTAGE	5.0 VDC
MUST OPERATE	2.9 VDC
MUST RELEASE	1.4 VDC MAX, 0.23 VDC MIN.

ENVIRONMENT:	
VIBRATION	10 CPS TO 3000 CPS @ 30 g's
SHOCK	75 g's 6 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C

NOTES: OPERATE TIME 4.0 MS MAX.
 RELEASE TIME 7.5 MS MAX.
 CONTACT BOUNCE 1.5 MS MAX.

CUSTOMER DATA SHEET

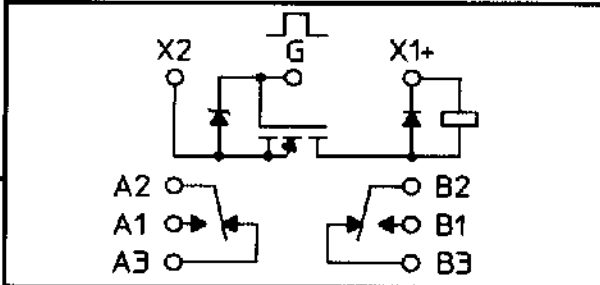

CONTACT RATING: LOW LEVEL TO 1A
 28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 9/18/97 *[Signature]* 8/25/98

COMMUNICATIONS INSTRUMENTS, INC.

CUST. TELEDYNE
 CUST. NO. ER136CM9-5A

TYPE "PRMGST" RELAY

PRMGST-5XW