


PART NUMBER	DESCRIPTION	ANODE (+) WIRE COLOR	CATHODE (-) WIRE COLOR	WIRE LENGTH
180555-0001	HOLDER ASSEMBLY W/O TUBING	WHITE	YELLOW	110±5
180555-0002	HOLDER ASSEMBLY W/O TUBING	RED	BLACK	254±5

COB MFG	TYPE	DIM 'A'	DIM 'B'	DIM 'C'	DIM 'Z'
CREE	CXA1304	13.35	13.35	7.5	1.15
CREE	CXA1310	13.35	13.35	7.5	1.00
CREE	CXB1304	13.35	13.35	7.5	1.15
CREE	CXB1310	13.35	13.35	7.5	1.00
BRIDGELUX	H6	13.35	13.35	7.5	1.1

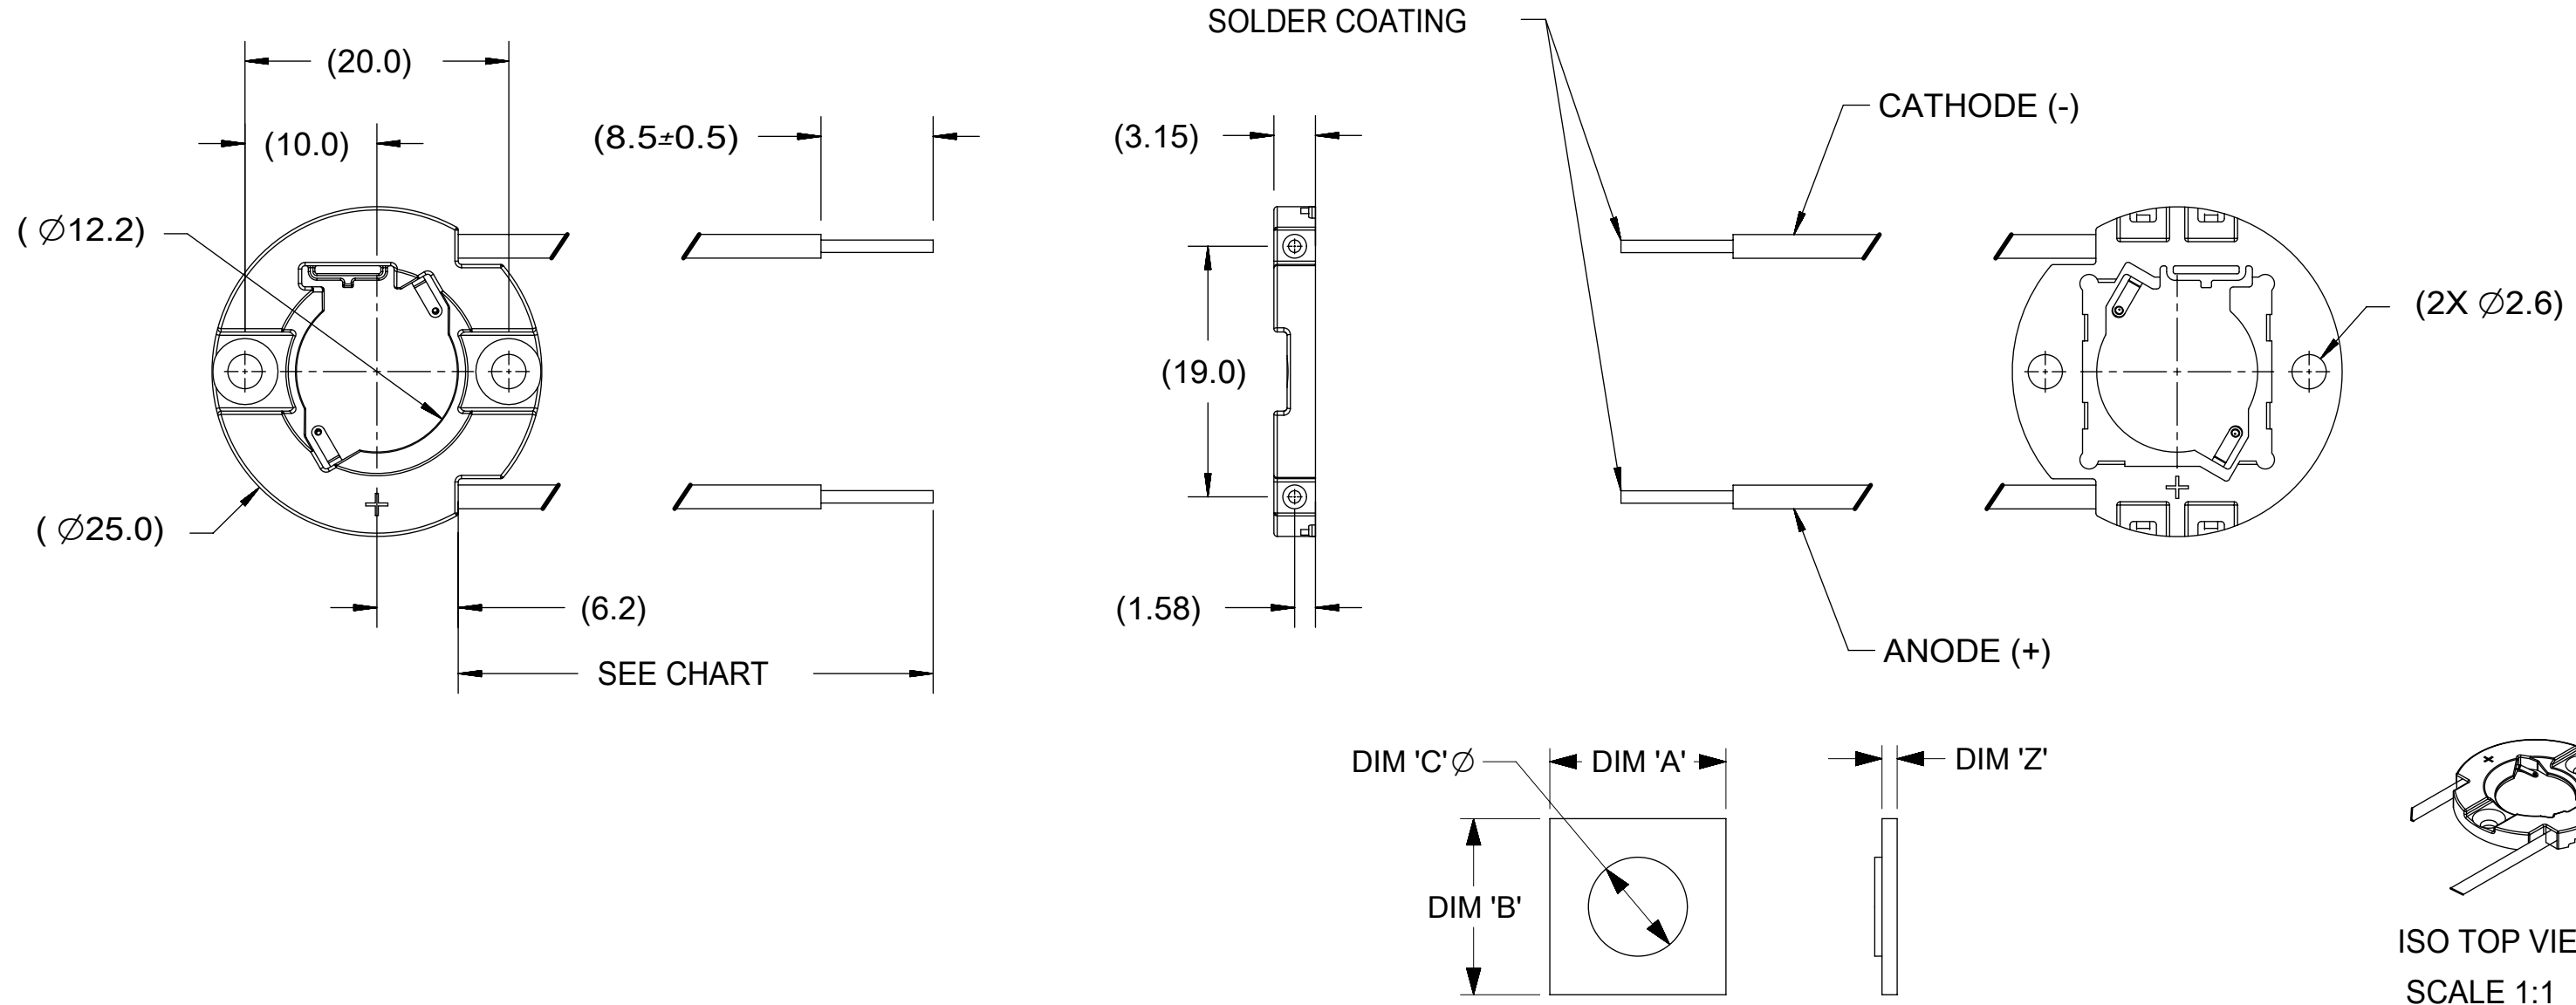

NOTES:

1. MATERIALS: HOUSING: GLASS FILLED POLYESTER (PBT), COLOR: WHITE, UL94V-0; TERMINAL: COPPER ALLOY WIRE: UL AWM STYLE 3266, 125° C RATED TEMPERATURE, INSULATION: XL-PE, CONDUCTOR: 20 AWG STRANDED COPPER.
2. FINISHES: TERMINAL CONTACT: GOLD OVER NICKEL
3. ALL DIMENSIONS IN PARENTHESES (XX.XX) ARE FOR REFERENCE ONLY
4. MOUNT HOLDER USING M2.5 SCREWS (2), 0.1 NEWTON METERS MIN; 0.2 NEWTON METERS MAX TORQUE
5. THIS PRODUCT IS ELV AND ROHS COMPLIANT

QUALITY SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION												
∇ = 0	EC NO: 108665 DRWN: LZABJANOVSKI CHK'D: APPR: GMEYER	2016/08/17	2016/09/21	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION UNITS	SCALE	molex®					
∇ = 0				ANGULAR TOL ± 0.5 °		MM	2:1						
∇ = 0				4 PLACES ±	DRWN BY	DATE	COB LED HOLDER ASSEMBLY 13.35 MM X 13.35 MM						
\blacktriangledown = 0				3 PLACES ±	MCOLE	2013/09/23							
∇ = 0				A3	REV	GMEYER	2 PLACES ± 0.13	CHK'D BY	DATE	PRODUCT CUSTOMER DRAWING			
∇ = 0							1 PLACE ± 0.25	GMEYER	2013/12/11				
\boxtimes = 0	0 PLACES ±	APPR BY	DATE				SERIES	MATERIAL NUMBER	CUSTOMER				
\blacksquare = 0	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		DMCGOWAN				2013/12/12	180555	SEE CHART	GENERAL MARKET			
∇ = 0	B		THIRD ANGLE PROJECTION		DRAWING SIZE		DOCUMENT NUMBER						
					B		SD-180555-001		DOC TYPE	DOC PART	SHEET NUMBER		
							PSD		000	1 OF 1			