

Honeywell



Representative photograph, actual product appearance may vary.

Due to regional agency approval requirements, some products may not be available in your area. Please contact your regional Honeywell office regarding your product of choice.

43C15K

43 Series Industrial Potentiometer, Wire Wound Element, Solder lug Terminals, 2 W Power Rating, 5 kOhm Resistance Value

Features

- Robust nickel-plated brass shaft and bushings
- Wirewound element
- Linear taper
- Very stable over the operating temperature

Typical Applications

- Manual controls
- Welding and heating

Description

The 43 Series is a 2 watt potentiometer made with a wirewound element. It offers a rugged metal construction and a linear taper.

Honeywell

43C15K

43 Series Industrial Potentiometer, Wire Wound Element, Solder lug Terminals, 2 W Power Rating, 5 kOhm Resistance Value


| Product Specifications | |
|-----------------------------|--------------------------------|
| Potentiometer Type | Industrial |
| Element Type | Wire Wound |
| Terminal Type | Solder lug |
| Power Rating | 2 W |
| Resistance Value | 5 kOhm |
| Resistance Tolerance | ± 5 % |
| Linearity | ± 2 % |
| Bushing Thread | 9,53 mm [0.375 in] x 32 NEF-2A |

| | |
|-------------------------------|--|
| Bushing length | 9,53 mm [0.375 in] |
| Bushing Type | Standard |
| Shaft Diameter | 6,35 mm [0.25 in] |
| Shaft length | 50,80 mm [2.0 in] |
| Shaft Ending | Plain round |
| Body | 28.6 mm [1.125 in] diameter, ± 0.79 mm [0.031 in], except at terminal standoff |
| Electrical Taper | Linear |
| Operating Temperature | -55 °C to 105 °C [-67 °F to 220 °F] |
| Working Voltage (Max.) | 310 V |
| Rotational Life | 10000 cycles |
| Mechanical Rotation | 300° |
| Availability | Global |
| Series Name | 43 Series |
| UNSPSC Code | 4111363300 |
| UNSPSC Commodity | 4111363300 Potentiometers |

Honeywell

43C15K

43 Series Industrial Potentiometer, Wire Wound Element, Solder lug Terminals, 2 W Power Rating, 5 kOhm Resistance Value

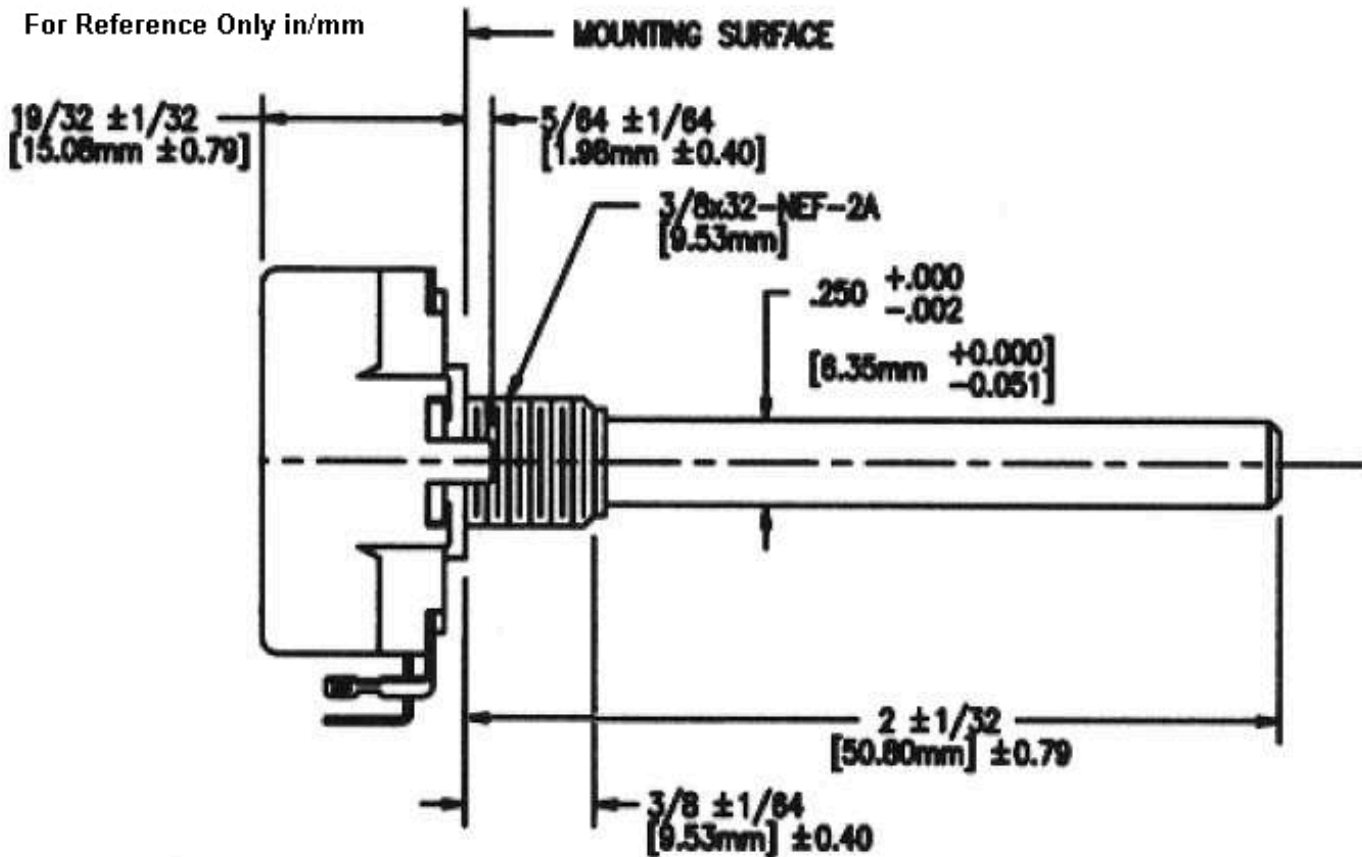

Honeywell

43C15K

43 Series Industrial Potentiometer, Wire Wound Element, Solder lug Terminals, 2 W Power Rating, 5 kOhm Resistance Value

⚠ WARNING

PERSONAL INJURY

DO NOT USE these products as safety or emergency stop devices, or in any other application where failure of the product could result in personal injury.

Failure to comply with these instructions could result in death or serious injury.

⚠ WARNING

MISUSE OF DOCUMENTATION

- The information presented in this product sheet (or catalog) is for reference only. DO NOT USE this document as product installation information.
- Complete installation, operation and maintenance information is provided in the instructions supplied with each product.

Failure to comply with these instructions could result in death or serious injury.

© Copyright Honeywell Inc. 1998-2004 All rights reserved.