


COIL: @ 25° c  
 RESISTANCE 520 OHMS ± 10%  
 NOMINAL VOLTAGE 18.0 VDC  
 MUST OPERATE 9.5 VDC  
 MUST RELEASE .95 VDC

ENVIRONMENT:  
 VIBRATION 10 CPS TO 2000 CPS AT 20 g's  
 SHOCK 100 g's 6 ± 1 MS. DURATION  
 TEMPERATURE -65 °C TO +125 °C

NOTES:  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_

CUSTOMER DATA SHEET

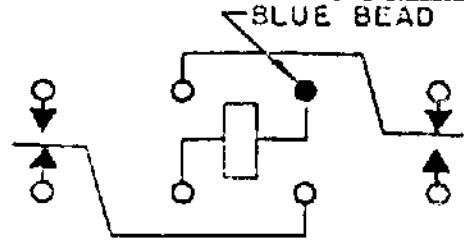

CONTACT RATING: LOW LEVEL TO  
2 A @ 28 VDC

DR 1-23-84 CK. OSW



CUST. CII STD  
 CUST. NO. \_\_\_\_\_

TYPE HFW RELAY

HFW 1201J00