

1590 Buckeye Drive
Milpitas, CA 95035-7418

June 27, 2016

Subject: Change in Packing Method for ZMOTION Pyroelectric Sensors

Dear Valued Customer:

We would like to inform you that the bulk packing method for the ZMOTION pyroelectric sensors has been changed. The drawings on the following page shows the change from horizontal packing of individual pyros to a vertical packing method. This should provided for improved stability of the pyro during transit.

Accordingly, the minimum packing quantity (MPQ) will now be 400 pieces, or in multiples of 400 pieces.

The following Zilog part numbers will be affected:

ZRE200GE
ZSBG446671
ZSBG323671

The transition to the new packaging is in process. There may be a short transition time when both packaging styles may be active.



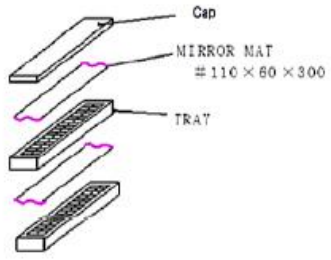
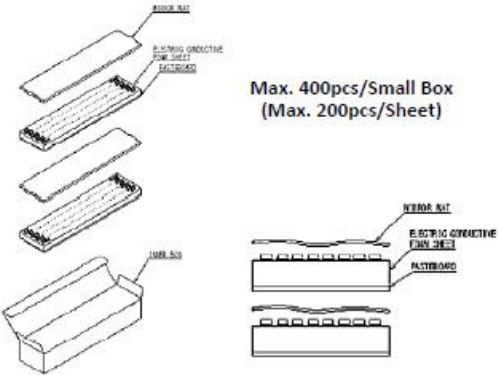

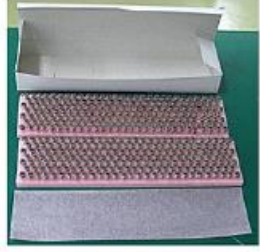
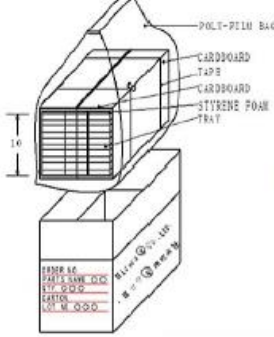
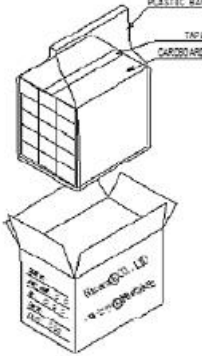
Should you have questions regarding this matter or need additional assistance, please contact zservice@zillog.com.

Thank you for your continued interest in IXYS products and services.

Sincerely,

Sonia Daley
sdaley@zillog.com
Director of Quality and Reliability
Zilog- an IXYS company

CHANGE IN PACKING METHOD

< From > Horizontal	< To > Vertical in Antistatic Mat
	
 <p>Max. 100pcs/Tray</p>	 <p>Max. 400pcs/Small Box (Max. 200pcs/Sheet)</p>
	
 <p>Max. 3,000pcs/Inner Carton</p>	 <p>Max. 6,000pcs/Inner Carton</p>