



27501 Bella Vista Pkwy
Warrenville, IL 60555

4 April 2017

Product Change Notice

Sub: Specification changes to entire part series.

Part series: MOX900

Effective Date: April 30th 2017

Effective 30 April 2017 the Ohmite Manufacturing MOX900 series will carry a different set of product specifications. April 30th is also the deadline to purchase products under the current specifications. Exceedingly long lead times have pushed Ohmite in to action to better supply our customers with product in a timely fashion. Old and New Specifications are listed below for convenience. Customers requiring last time buys of products using the old specifications should send Purchase Orders on or before the effective date. Leadtimes for the new MOX900 will be 10-12 weeks, a significant reduction over the current 26-30 weeks. Specification and Dimensional changes are listed below for reference. Complete list of standard parts affected are listed as well. To easily distinguish between the old and new versions of MOX900 the color of the product's coating is changing from black (current) to blue (new).

New Country of Origin: Austria

Characteristics and Specifications:


	OLD					
	Power Rating	Max Voltage	Res Range	Tol range*	STD TCR *	Derating Temp
	Watts	Volts	Ohms	%	ppm	°C
MOX910	3.8	15Kv	1K-5G	0.05-10	50/100	225
MOX920	5	21Kv	1K-10G	0.05-10	50/100	225
MOX930	7.5	30Kv	1K-15G	0.25-10	50/100	225
MOX940	10	45Kv	1K-25G	0.25-10	50/100	225
MOX950	13.5	60Kv	1K-30G	0.25-10	50/100	225
MOX960	16	72Kv	1K-40G	0.25-10	50/100	225
MOX970	20	90Kv	1K-50G	0.25-10	50/100	225

* value dependent

	NEW					
	Power Rating	Max Voltage	Res Range	Tol range*	STD TCR *	Derating Temp
	Watts	Volts	Ohms	%	ppm	°C
MOX910	3.9	9.4Kv	600-10G	0.1-10	50/100	175
MOX920	4.6	13.8Kv	500-10G	0.1-10	50/100	175
MOX930	7.8	20Kv	400-10G	0.1-10	50/100	175
MOX940	11.7	30Kv	600-10G	0.1-10	50/100	175
MOX950	12.5	40Kv	800-10G	0.1-10	50/100	175
MOX960	15.5	50Kv	1M-10G	0.1-10	50/100	175
MOX970	19.4	60Kv	1M-10G	0.1-10	50/100	175

* value dependent

Dimensions:

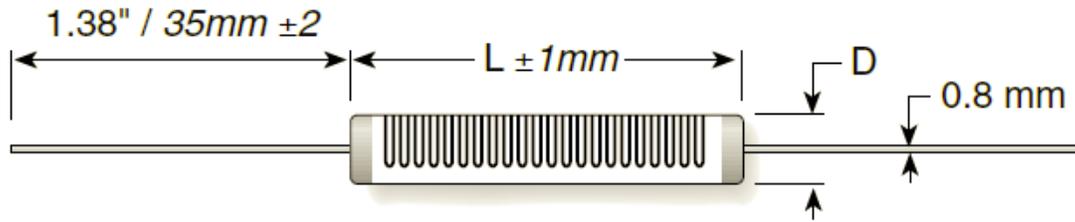

	OLD		NEW		
	mm ± 1		mm ± 0.5		
	Dim L	Dim D	Dim L	Dim D	Lead Dia
MOX910	27	8	27.2	8.2	1
MOX920	37	8	39.5	8.2	1
MOX930	52	8	52	8.2	1
MOX940	77	8	77.6	8.2	1
MOX950	102	8.3	103.2	8.2	1
MOX960	122	8.5	123.7	8.2	1
MOX970	152	8.5	153.7	8.2	1

Affected Standard parts:

MOX91021004FVE	MOX93021004FVE	MOX95025004FVE
MOX91025004FVE	MOX93025004FVE	MOX95021005FVE
MOX91021005FVE	MOX93021005FVE	MOX95022505FTE
MOX91022505FTE	MOX93022505FVE	MOX96021005FVE
MOX92021005FVE	MOX94021007FVE	MOX96025005FVE
MOX92025005FVE	MOX94021007FTE	MOX96021006FVE
MOX92021006FVE	MOX94021005FVE	MOX96021007FTE
MOX92021007FVE	MOX94025005FVE	MOX97021004FVE
MOX92021007FTE	MOX94021006FVE	MOX97025004FVE
MOX92022505FTE	MOX95021004FVE	MOX97021005FVE
		MOX97022505FTE

Best Regards,

Brandon Metzger
Product Manager

CC: Kirk Schwiebert
Director of New Product Development

Information, data and drawings embodied in this correspondence are strictly confidential and are supplied on the understanding that they will be held confidentially and not disclosed to third parties without the prior written consent of Ohmite Manufacturing Company, Inc.