

Customer Part:



Description

- 1.6 x 1.2mm crystal oscillator in a ceramic package with a seam sealed metal lid, hermetically sealed.
- Model IQXO-986
- Model Issue number 1

Frequency Parameters

- Frequency 32.7680kHz
- Frequency Stability ± 30.00 ppm
- Operating Temperature Range -20.00 to 70.00°C
- Frequency Stability: Includes Frequency Tolerance @ 25°C, operating temperature range, supply voltage variation and load variation.

Electrical Parameters

- Supply Voltage 1.8V $\pm 10\%$
- Current Draw (typ) 0.024mA

Output Details

- Output Compatibility CMOS
- Drive Capability 15pF max
- Rise and Fall Time 200.0ns max
- Duty Cycle 45/55
- Output Voltage Levels:
Output Low (VoL): 10%Vs max
Output High (VoH): 90%Vs min
- Start Up Time: 10ms max

Output Control

- Stand-by Mode:
Logic '0' (30%Vs max) to pad 1 disables the oscillator output, the output goes to a high impedance state.
Logic '1' (70%Vs min) or no connection to pad 1 enables oscillator output.
- Stand-by Current: 1.4µA typical 3µA max

Environmental Parameters


- Storage Temperature Range: -40 to 85°C

Compliance


- RoHS Status (2015/863/EU) Compliant
- REACH Status Compliant
- MSL Rating (JDEC-STD-033): Not Applicable

Packaging Details


- Pack Style: Reel Tape & reel in accordance with EIA-481-D
Pack Size: 3,000
- Alternative packing option available



Outline (mm)

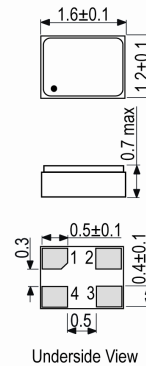


- Pad Connections
- Standby Operation
 - GND
 - Output
 - +Vs



Underside View

Test Circuit

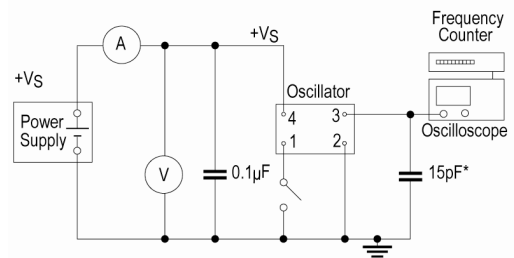

* Inclusive of jiggging and equipment capacitance

Sales Office Contact Details:


UK: +44 (0)1460 270200
Germany: 0800 1808 443

France: 0800 901 383
USA: +1.760.318.2824

Email: info@iqdfrequencyproducts.com
Web: www.iqdfrequencyproducts.com

Customer Part:

Wave Form

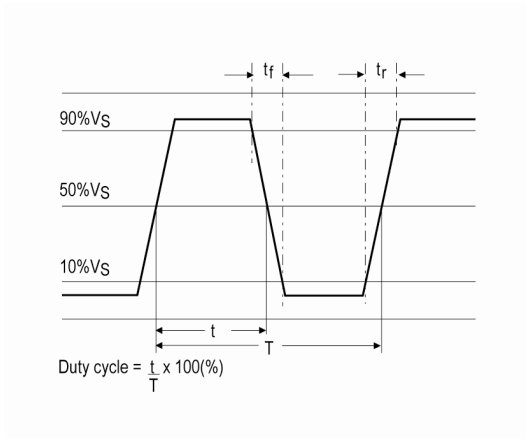

Sales Office Contact Details:

UK: +44 (0)1460 270200
Germany: 0800 1808 443

France: 0800 901 383
USA: +1.760.318.2824

Email: info@iqdfrequencyproducts.com
Web: www.iqdfrequencyproducts.com