

2N4296
2N4298
2N4299

**SILICON
NPN POWER TRANSISTORS**



TO-66 CASE



www.centrasemi.com

DESCRIPTION:

The CENTRAL SEMICONDUCTOR 2N4296, 2N4298, and 2N4299 devices are silicon NPN power transistors designed for power amplifier and switching applications.

MARKING: FULL PART NUMBER

MAXIMUM RATINGS: ($T_C=25^\circ\text{C}$)

Collector-Base Voltage
Collector-Emitter Voltage
Emitter-Base Voltage
Continuous Collector Current
Continuous Base Current
Power Dissipation
Operating and Storage Junction Temperature
Thermal Resistance

SYMBOL	2N4296	2N4298	2N4299	UNITS
V_{CBO}	350	500	350	V
V_{CEO}	250	350	250	V
V_{EBO}		4.0		V
I_C		1.0		A
I_B		250		mA
P_D		20		W
T_J, T_{stg}		-65 to +175		$^\circ\text{C}$
θ_{JC}		7.5		$^\circ\text{C/W}$

ELECTRICAL CHARACTERISTICS: ($T_C=25^\circ\text{C}$ unless otherwise noted)

SYMBOL	TEST CONDITIONS	2N4296		2N4298		2N4299		UNITS
		MIN	MAX	MIN	MAX	MIN	MAX	
I_{CEV}	$V_{CE}=150\text{V}, V_{BE}=1.5\text{V}, T_C=135^\circ\text{C}$	-	600	-	600	-	600	μA
I_{CBO}	$V_{CB}=350\text{V}$	-	100	-	-	-	100	μA
I_{CBO}	$V_{CB}=500\text{V}$	-	-	-	100	-	-	μA
I_{EBO}	$V_{BE}=4.0\text{V}$	-	100	-	100	-	100	μA
BV_{CEO}	$I_C=50\text{mA}$	200	-	350	-	250	-	V
$V_{CE(SAT)}$	$I_C=50\text{mA}, I_B=5.0\text{mA}$	-	0.9	-	0.9	-	0.75	V
$V_{BE(SAT)}$	$I_C=50\text{mA}, I_B=5.0\text{mA}$	-	1.5	-	1.5	-	1.5	V
$V_{BE(ON)}$	$V_{CE}=10\text{V}, I_C=100\text{mA}$	-	0.9	-	0.9	-	0.9	V
h_{FE}	$V_{CE}=10\text{V}, I_C=5.0\text{mA}$	35	-	20	-	35	-	
h_{FE}	$V_{CE}=10\text{V}, I_C=50\text{mA}$	50	150	25	75	50	150	
h_{FE}	$V_{CE}=10\text{V}, I_C=100\text{mA}$	35	-	20	-	35	-	
f_T	$V_{CE}=10\text{V}, I_C=20\text{mA}, f=5.0\text{MHz}$	20	-	20	-	20	-	MHz
C_{cb}	$V_{CB}=100\text{V}, I_C=0, f=0.1$ to 1.0MHz	-	6.0	-	6.0	-	6.0	pF
t_{on}	$V_{CC}=100\text{V}, I_C=100\text{mA}, I_{B1}=I_{B2}=10\text{mA}$	-	7.0	-	7.0	-	7.0	μs
t_{off}	$V_{CC}=200\text{V}, I_C=100\text{mA}, I_{B1}=I_{B2}=10\text{mA}$	-	10	-	10	-	10	μs
$I_{S/b}$	$V_{CE}=200\text{V}$	75	-	75	-	75	-	mA


R1 (2-September 2014)

2N4296
2N4298
2N4299

SILICON
NPN POWER TRANSISTORS



TO-66 CASE - MECHANICAL OUTLINE

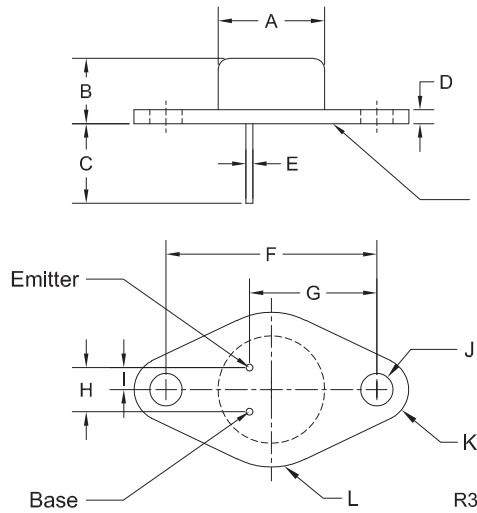

Seating Plane:
The seating plane must be within 0.001" concave to 0.004" convex within 0.600" diameter from the center of the device.

MARKING:
FULL PART NUMBER

DIMENSIONS				
SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A (DIA)	0.470	0.500	11.94	12.70
B	0.250	0.340	6.35	8.64
C	0.360	-	9.14	-
D	0.050	0.075	1.27	1.91
E (DIA)	0.028	0.034	0.71	0.86
F	0.956	0.964	24.28	24.48
G	0.570	0.590	14.48	14.99
H	0.190	0.210	4.83	5.33
I	0.093	0.107	2.36	2.72
J (DIA)	0.142	0.152	3.61	3.86
K (RAD)	0.141		3.58	
L (RAD)	0.345		8.76	

TO-66 (REV:R3)

R1 (2-September 2014)

OUTSTANDING SUPPORT AND SUPERIOR SERVICES



PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2nd day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

REQUESTING PRODUCT PLATING

1. If requesting Tin/Lead plated devices, add the suffix " TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
2. If requesting Lead (Pb) Free plated devices, add the suffix " PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

CONTACT US

Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.
145 Adams Avenue
Hauppauge, NY 11788 USA
Main Tel: (631) 435-1110
Main Fax: (631) 435-1824
Support Team Fax: (631) 435-3388
www.centrasemi.com

Worldwide Field Representatives:
www.centrasemi.com/wwreps

Worldwide Distributors:
www.centrasemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: www.centrasemi.com/terms

Product End of Life Notification

PDN ID:	PDN01247
Notification Date:	9/01/22
Last Buy Date:	3/01/23
Last Shipment Date	9/01/23

Summary: The following transistors are discontinued and now classified as of End of Life (EOL).

Although Central Semiconductor Corp. makes every effort to continue to produce devices that have been proclaimed EOL (End of Life) by other manufacturers, it is an accepted industry practice to discontinue certain devices when customer demand falls below a minimum level of sustainability. Accordingly, the following product(s) have been transitioned to End of Life status as part of Central's ongoing Product Portfolio Management. Any replacement products are noted below. The effective date for placing last purchase orders will be six (6) months from the date of this notice and twelve (12) months from the notice date for final shipments, and minimum order quantities may apply. The last purchase and shipment dates may be extended if inventory is available.

*** All Plating types (PBFREE, TIN/LEAD) for each item listed are included in this notice.**

Central Part Number	Suggested Replacement
BCY79-VIII	N/A
CEN853	N/A
CZT32C BK	N/A
CZT32C TR	N/A
2N3583	N/A
2N3584	N/A
2N3585	N/A
2N3738	N/A
2N3740	N/A
2N3741	N/A
2N3741A	N/A
2N4299	N/A
2N4900	N/A
2N6107	N/A
2N6317	N/A
2N6318	N/A
2N6467	N/A
2N6468	N/A

Central would be happy to assist you by providing additional information or technical data to help locate an alternate source if we have no replacement available. If you would like assistance, please visit <https://my.centrasemi.com/submit-inquiry?type=ER> to submit an online inquiry.

DISCLAIMER: This End of Life (EOL) notification is in accordance with JEDEC standard JESD48 - Product Discontinuance. Central Semiconductor Corp. will make every effort to offer life-time buy (LTB) opportunities and/or offer replacement devices to existing customers for discontinued devices, however, one or both may not be possible for all devices. Please contact your local Central Semiconductor sales representative for LTB opportunities/additional information.